INTRODUCTION


OUTLINE OF NEW FEATURES


The following changes have been made for the new model.

1. Exterior

The following dedicated parts are provided on sport package models with a supercharger.

Radiator Grille	A dedicated color radiator grille is provided.
Radiator Grille Lower No. 1	A dedicated color radiator grille lower No. 1 is provided.
Wheel Assembly	A dedicated color wheel assembly is provided.
Front Bumper Spoiler	A front bumper with its lower section positioned below the radiator grille lower No. 1 painted in a same color is provided.
Rear Bumper Spoiler	A rear bumper compatible with a dedicated muffler is provided.
Fog Bezel	A fog bezel painted in a dedicated color is provided.
Emblem	SUPER CHARGER emblems are provided on the right and left front doors and back door.
Door Outside Handle Cover	A door outside handle cover of the same color as the vehicle body is provided.
Outer Rear View Mirror Assembly	A black outer rear view mirror assembly is provided.
Headlight Assembly	A headlight assembly which is smoke-plated on its inner surface is provided.
Rear Combination Light Assembly	A rear combination light assembly is provided. The lens has been made clear and the inner surface has been smoke-plated.
Outside Molding	Black outside molding is provided.
Back Door Garnish	A black door garnish sub-assembly outside and a back door garnish sub-assembly outside lower are provided.
Roof Rail	A black roof rail is provided
Muffler	A tail pipe with a large diameter is provided (for G.C.C. countries and Saudi Arabia).

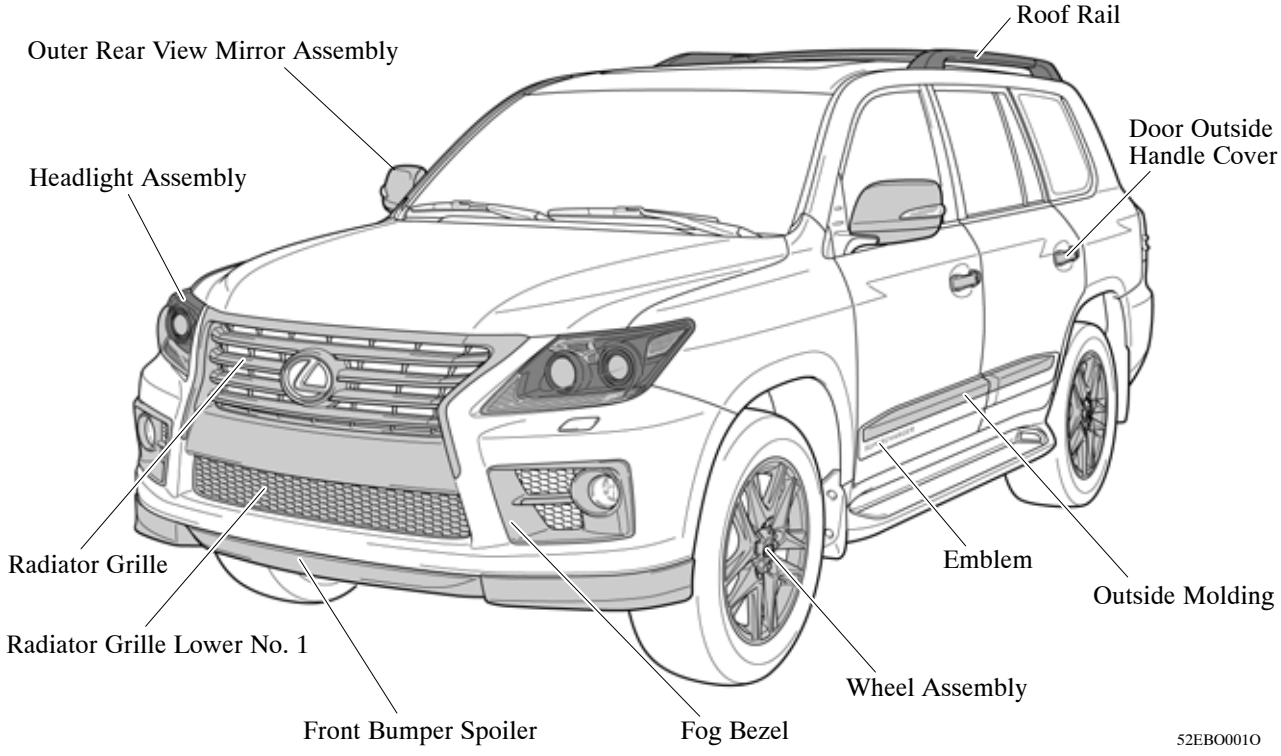

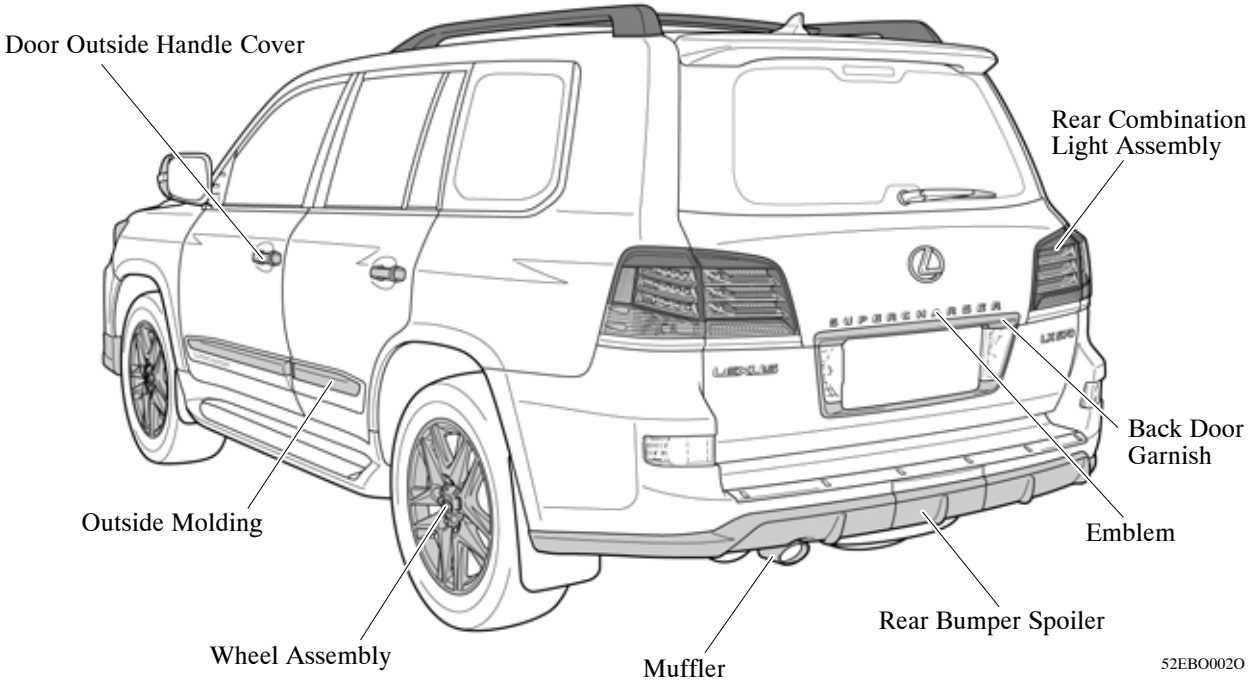


2. Interior

A dedicated scuff plate for sport package models with a supercharger is provided.

3. Smart Entry and Start System

A dedicated key design for sport package models with a supercharger is provided.

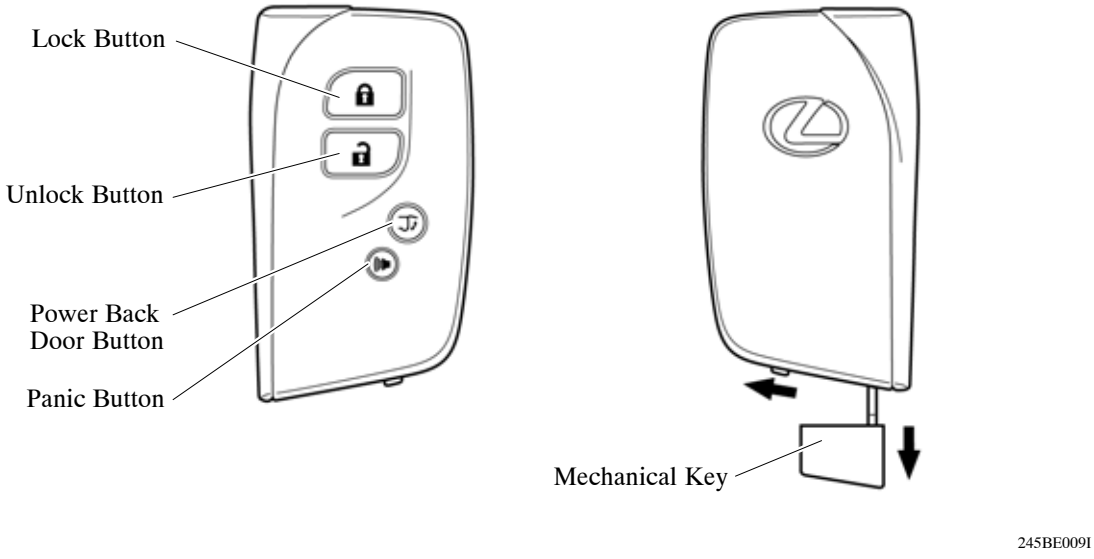

MODEL CODE

URJ201 L – G N T G K W

1 2 3 4 5 6 7 8

	BASIC MODEL CODE
1	URJ201 : With 3UR-FE Engine URJ202 : With 1UR-FE Engine

	STEERING WHEEL POSITION
2	L: Left-hand Drive R: Right-hand Drive

	BODY TYPE
3	G : Station Wagon

	BACK DOOR TYPE / SEATING CAPACITY
4	N : Lift-up / 8-seater

	GEAR SHIFT TYPE
5	T : 6-speed Automatic, Floor

	GRADE
6	G : LX

	ENGINE SPECIFICATION
7	K : DOHC and EFI

	DESTINATION
8	W : Europe V : G.C.C. Countries Q : Australia C : China

MODEL LINE-UP

DESTINATION	ENGINE	BODY TYPE	SEATING CAPACITY	GRADE	TRANSMISSION
					AB60F 6-speed Automatic
Europe*1	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKW
G.C.C. Countries*2	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKV
Australia*3	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201R-GNTGKQ
China	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKC
Hong Kong	1UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ202R-GNTGKQ

*1: A package model option for Russia, Ukraine, Kazakhstan, Taiwan, Azerbaijan, Georgia, Armenia and Belarus is included.

*2: A package model option for Costa Rica, Philippines, Peru, Central America, Saudi Arabia, Vietnam, Syria, Lebanon, Jordan and Colombia is included.

*3: A package model option for South Africa, New Zealand, Indonesia and Brunei is included.

MAJOR TECHNICAL SPECIFICATIONS

Item \ Area				G.C.C. Countries	Australia	Hong Kong	Europe
Body Type				Station Wagon (8-seater)			
Vehicle Grade				LX			
Model Code				URJ201L-GNTGKV	URJ201R-GNTGKQ	URJ202R-GNTGKQ	URJ201L-GNTGKW
Major Dimensions & Vehicle Weights	Overall	Length	mm (in.)	5005 (197.0)	5020 (197.6)	5020 (197.6)	4990 (196.5)
		Width	mm (in.)	1970 (77.6)	1970 (77.6)	1970 (77.6)	1970 (77.6)
		Height	mm (in.)	1865 (73.4)	1865 (73.4)	1865 (73.4)	1920 (75.6)
	Wheel Base		mm (in.)	2850 (112.2)	2850 (112.2)	-	2850 (112.2)
	Tread*1	Front	mm (in.)	1640 (64.6)	1640 (64.6)	-	1640 (64.6)
		Rear	mm (in.)	1635 (64.4)	1635 (64.4)	-	1635 (64.4)
	Room	Length	mm (in.)	2615 (103.0)	2615 (103.0)	2615 (103.0)	2615 (103.0)
		Width	mm (in.)	1655 (65.2)	1655 (65.2)	1655 (65.2)	1655 (65.2)
		Height	mm (in.)	1200 (47.2)	1200 (47.2)	1200 (47.2)	1200 (47.2)
	Overhang	Front	mm (in.)	970 (38.2)	970 (38.2)	970 (38.2)	970 (38.2)
		Rear	mm (in.)	1185 (46.7)	1200 (47.2)	1200 (47.2)	1185 (46.7)
	Min. Running Ground Clearance		mm (in.)	225 (8.9)	225 (8.9)	-	225 (8.9)
	Angle of Approach		degrees	25	25	25	25
	Angle of Departure		degrees	20	20	-	20
	Curb Weight	Front	kg (lb)	1355 - 1370 (2987 - 3020)	1370 - 1380 (3020 - 3042), 1380 - 1390 (3042 - 3064)*3	1350 - 1365 (2976 - 3009)	1375 - 1385 (3031 - 3053)
		Rear	kg (lb)	1330 - 1380 (2932 - 3042)	1360 - 1370 (2998 - 3020), 1305 - 1330 (2877 - 2932)*3	1350 - 1375 (2976 - 3031)	1280 - 1325 (2822 - 2921)
		Total	kg (lb)	2685 - 2750 (5919 - 6063)	2730 - 2750 (6019 - 6063), 2685 - 2720 (5919 - 5997)*3	2700 - 2740 (5952- 6041)	2655 - 2710 (5853 - 5975)
	Gross Vehicle Weight	Front	kg (lb)	1455 (3208)	1465 (3230)	1445 (3186)	1460 (3219)
		Rear	kg (lb)	1895 (4178)	1885 (4156)	1905 (4200)	1890 (4167)
		Total	kg (lb)	3350 (7385)	3350 (7385)	3350 (7385)	3350 (7385)
	Fuel Tank Capacity		L (Imp. gal.)	93 + 45 (20.5 + 9.9)	93 + 45 (20.5 + 9.9)	93 + 45 (20.5 + 9.9)	93 (20.5)
	Luggage Capacity (VDA)		m^3 (cu.ft.)	0.259 (9.1)	0.259 (9.1)	0.259 (9.1)	0.259 (9.1)
Performance	Max. Speed		km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Max. Cruising Speed		km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Acceleration	0 to 100 km/h	sec.	7.8	7.8	-	7.8
		0 to 400 m	sec.	15.8	15.8	-	15.8
	Max. Permissible Speed*2	1st Gear	km/h (mph)	66 (41)	66 (41)	-	66 (41)
		2nd Gear	km/h (mph)	113 (70)	113 (70)	-	113 (70)
		3rd Gear	km/h (mph)	164 (102)	164 (102)	-	164 (102)
		4th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
		5th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
		6th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Min. Turning Radius	Tire	m (ft.)	5.9 (19.4)	5.9 (19.4)	-	5.9 (19.4)
		Body	m (ft.)	3.4 (11.2)	3.4 (11.2)	-	3.4 (11.2)
Engine	Engine Type			3UR-FE	3UR-FE	1UR-FE	3UR-FE
	No. of Cyls. & Arrangement			8-cylinder, V-type	8-cylinder, V-type	8-cylinder, V-type	8-cylinder, V-type
	Valve Mechanism			32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)
	Bore × Stroke		mm (in.)	94.0 × 102.0 (3.70 × 4.02)	94.0 × 102.0 (3.70 × 4.02)	94.0 × 83.0 (3.70 × 3.27)	94.0 × 102.0 (3.70 × 4.02)
	Displacement		cm^3 (cu.in.)	5663 (345.6)	5663 (345.6)	4608 (281.2)	5663 (345.6)
	Compression Ratio			10.2 : 1	10.2 : 1	10.2 : 1	10.2 : 1
	Fuel System			EFI	EFI	EFI	EFI
	Research Octane No.			91 or higher	91 or higher	95 or higher	91 or higher
	Max. Output (ECC)		kW@rpm	270@5600	270@5600	234@5600	270@5600
	Max. Torque (ECC)		N·m@rpm	530@3200	530@3200	460@3400	530@3200
Engine Electrical	Battery Capacity (5HR)		Voltage & Amp. hr.	12 - 64	12 - 64	12 - 64	12 - 64
	Alternator Output		Watts	1800	1800	1800	1800
	Starter Output		kW	2.0	2.0	2.0	2.0
Chassis	Clutch Type			-	-	-	-
	Transmission Type			AB60F	AB60F	AB60F	AB60F
	Transmission Gear Ratio	1st		3.333	3.333	3.333	3.333
		2nd		1.960	1.960	1.960	1.960
		3rd		1.353	1.353	1.353	1.353
		4th		1.000	1.000	1.000	1.000
		5th		0.728	0.728	0.728	0.728
		6th		0.588	0.588	0.588	0.588
		Reverse		3.061	3.061	3.061	3.061
	Transfer Gear Ratio		H4/L4	1.000/2.618	1.000/2.618	1.000/2.618	1.000/2.618
	Differential Gear Ratio (Front/Rear)			3.909/3.909	3.909/3.909	4.300/4.300	3.909/3.909
	Differential Gear Size (Front/Rear)		mm (in.)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)
	Brake Type	Front		Ventilated Disc	Ventilated Disc	Ventilated Disc	Ventilated Disc
		Rear		Ventilated Disc	Ventilated Disc	Ventilated Disc	Ventilated Disc
	Parking Brake Type			Duo-servo Drum	Duo-servo Drum	Duo-servo Drum	Duo-servo Drum
	Brake Booster Type			Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Proportioning Valve Type			-	-	-	-
	Suspension Type	Front		Double-wishbone	Double-wishbone	Double-wishbone	Double-wishbone
		Rear		4-link with Lateral Rod	4-link with Lateral Rod	4-link with Lateral Rod	4-link with Lateral Rod
	Stabilizer Bar	Front		Standard	Standard	Standard	Standard
		Rear		Standard	Standard	Standard	Standard
	Steering Gear Type			Rack and Pinion	Rack and Pinion	Rack and Pinion	Rack and Pinion
	Steering Gear Ratio			14.2 - 17.6	14.2 - 17.6	14.2 - 17.6	14.2 - 17.6
	Power Steering Type			Hydraulic	Hydraulic	Hydraulic	Hydraulic

*1: Unladen vehicle
*2: Transfer in high
*3: Models for South Africa

1	China
	Station Wagon (8-seater)
	LX
	URJ201L-GNTGKC
5	5005 (197.0)
	1970 (77.6)
	1920 (75.6)
	2850 (112.2)
	1640 (64.6)
10	1635 (64.4)
	2615 (103.0)
	1655 (65.2)
	1200 (47.2)
	970 (38.2)
15	1185 (46.7)
	225 (8.9)
	25
	20
	1380 (3042)
20	1370 (3020)
	2750 (6063)
	1465 (3230)
	1885 (4156)
	3350 (7385)
25	93 + 45 (20.5 + 9.9)
	0.259 (9.1)
	220 (136)
	220 (136)
	7.8
30	15.8
	66 (41)
	113 (70)
	164 (102)
	220 (136)
35	220 (136)
	220 (136)
	5.9 (19.4)
	3.4 (11.2)
	3UR-FE
40	8-cylinder, V-type
	32-valve DOHC, Chain Drive (with Dual VVT-i)
	94.0 × 102.0 (3.70 × 4.02)
	5663 (345.6)
	10.2 : 1
45	EFI
	91 or higher
	270@5600
	530@3200
	12 - 64
50	1800
	2.0
	-
	AB60F
	3.333
55	1.960
	1.353
	1.000
	0.728
	0.588
60	3.061
	1.000/2.618
	3.909/3.909
	220 (8.7)/240 (9.5)
	Ventilated Disc
65	Ventilated Disc
	Duo-servo Drum
	Hydraulic
	-
	Double-wishbone
70	4-link with Lateral Rod
	Standard
	Standard
	Rack and Pinion
	14.2 - 17.6
75	Hydraulic


INTRODUCTION

OUTLINE OF NEW FEATURES

The following changes have been made for the new model.

1. Interior

A new interior color, Topaz Brown, is provided for the lower part of the armrest of the front door trim board sub-assembly and rear door trim board sub-assembly.

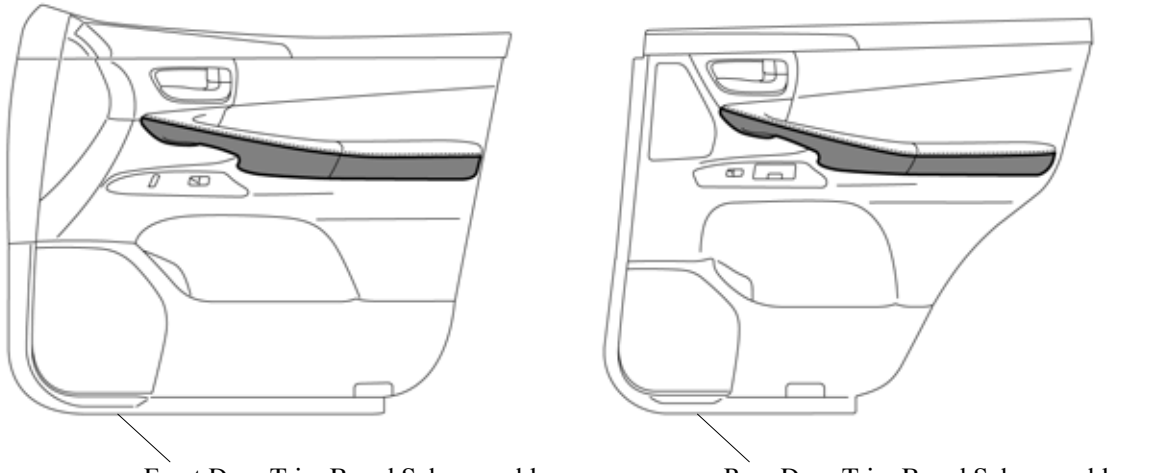


70UBO001O

: Topaz Brown

2. Seat

A new interior color, Topaz Brown, is provided for the seat cover.

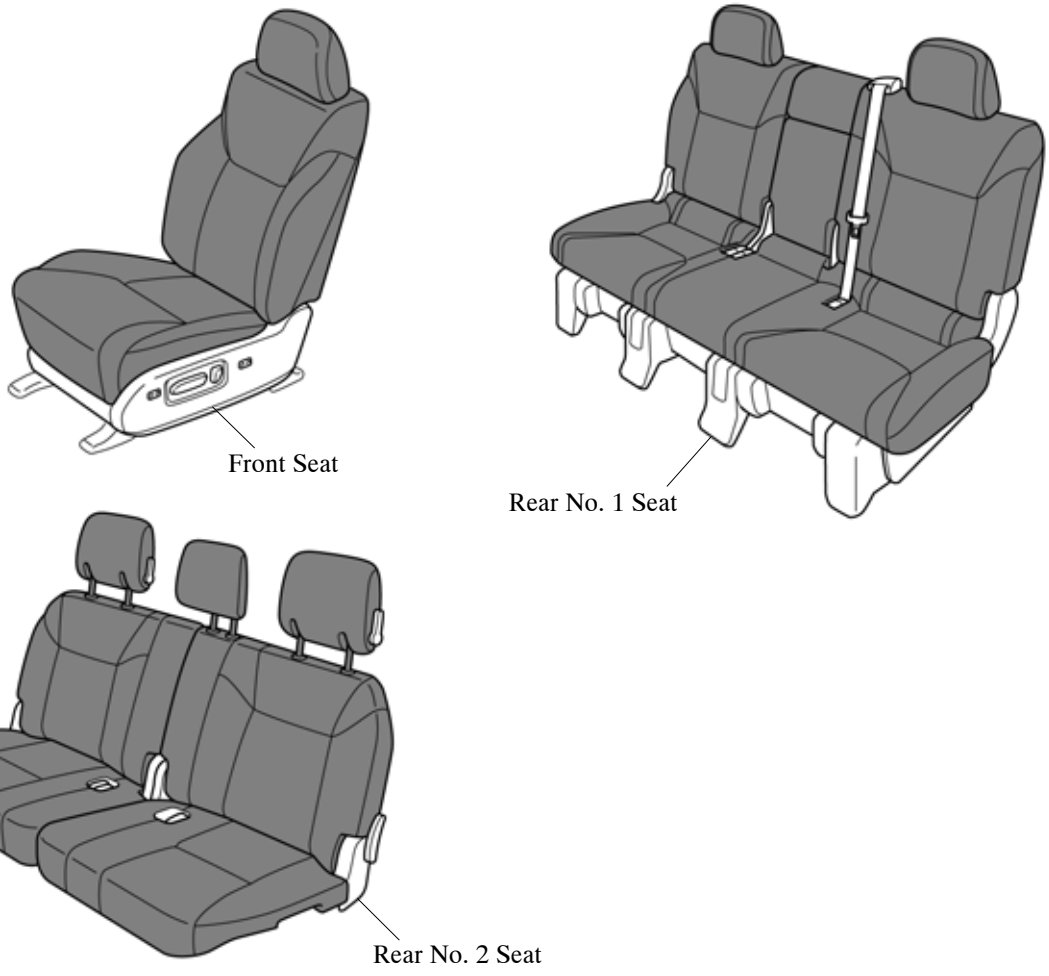

MODEL CODE

URJ201 L – G N T G K W

1 2 3 4 5 6 7 8

	BASIC MODEL CODE
1	URJ201 : With 3UR-FE Engine URJ202 : With 1UR-FE Engine

	STEERING WHEEL POSITION
2	L: Left-hand Drive R: Right-hand Drive

	BODY TYPE
3	G : Station Wagon

	BACK DOOR TYPE / SEATING CAPACITY
4	N : Lift-up / 8-seater

	GEAR SHIFT TYPE
5	T : 6-speed Automatic, Floor

	GRADE
6	G : LX

	ENGINE SPECIFICATION
7	K : DOHC and EFI

	DESTINATION
8	W : Europe V : G.C.C. Countries Q : Australia C : China

MODEL LINE-UP

DESTINATION	ENGINE	BODY TYPE	SEATING CAPACITY	GRADE	TRANSMISSION
					AB60F 6-speed Automatic
Europe*1	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKW
G.C.C. Countries*2	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKV
Australia*3	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201R-GNTGKQ
China	3UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ201L-GNTGKC
Hong Kong	1UR-FE	Station Wagon Lift-up Back Door	8	LX	URJ202R-GNTGKQ

*1: A package model option for Russia, Ukraine, Kazakhstan, Taiwan, Azerbaijan, Georgia, Armenia and Belarus is included.

*2: A package model option for Costa Rica, Philippines, Peru, Central America, Saudi Arabia, Vietnam, Syria, Lebanon, Jordan and Colombia is included.

*3: A package model option for South Africa, New Zealand, Indonesia and Brunei is included.

MAJOR TECHNICAL SPECIFICATIONS

Item \ Area				G.C.C. Countries	Australia	Hong Kong	Europe
Body Type				Station Wagon (8-seater)			
Vehicle Grade				LX			
Model Code				URJ201L-GNTGKV	URJ201R-GNTGKQ	URJ202R-GNTGKQ	URJ201L-GNTGKW
Major Dimensions & Vehicle Weights	Overall	Length	mm (in.)	5005 (197.0)	5020 (197.6)	5020 (197.6)	4990 (196.5)
		Width	mm (in.)	1970 (77.6)	1970 (77.6)	1970 (77.6)	1970 (77.6)
		Height	mm (in.)	1865 (73.4)	1865 (73.4)	1865 (73.4)	1920 (75.6)
	Wheel Base		mm (in.)	2850 (112.2)	2850 (112.2)	-	2850 (112.2)
	Tread*1	Front	mm (in.)	1640 (64.6)	1640 (64.6)	-	1640 (64.6)
		Rear	mm (in.)	1635 (64.4)	1635 (64.4)	-	1635 (64.4)
	Room	Length	mm (in.)	2615 (103.0)	2615 (103.0)	2615 (103.0)	2615 (103.0)
		Width	mm (in.)	1655 (65.2)	1655 (65.2)	1655 (65.2)	1655 (65.2)
		Height	mm (in.)	1200 (47.2)	1200 (47.2)	1200 (47.2)	1200 (47.2)
	Overhang	Front	mm (in.)	970 (38.2)	970 (38.2)	970 (38.2)	970 (38.2)
		Rear	mm (in.)	1185 (46.7)	1200 (47.2)	1200 (47.2)	1185 (46.7)
	Min. Running Ground Clearance		mm (in.)	225 (8.9)	225 (8.9)	-	225 (8.9)
	Angle of Approach		degrees	25	25	25	25
	Angle of Departure		degrees	20	20	-	20
	Curb Weight	Front	kg (lb)	1355 - 1370 (2987 - 3020)	1370 - 1380 (3020 - 3042), 1380 - 1390 (3042 - 3064)*3	1350 - 1365 (2976 - 3009)	1375 - 1385 (3031 - 3053)
		Rear	kg (lb)	1330 - 1380 (2932 - 3042)	1360 - 1370 (2998 - 3020), 1305 - 1330 (2877 - 2932)*3	1350 - 1375 (2976 - 3031)	1280 - 1325 (2822 - 2921)
		Total	kg (lb)	2685 - 2750 (5919 - 6063)	2730 - 2750 (6019 - 6063), 2685 - 2720 (5919 - 5997)*3	2700 - 2740 (5952- 6041)	2655 - 2710 (5853 - 5975)
	Gross Vehicle Weight	Front	kg (lb)	1455 (3208)	1465 (3230)	1445 (3186)	1460 (3219)
		Rear	kg (lb)	1895 (4178)	1885 (4156)	1905 (4200)	1890 (4167)
		Total	kg (lb)	3350 (7385)	3350 (7385)	3350 (7385)	3350 (7385)
	Fuel Tank Capacity		L (Imp. gal.)	93 + 45 (20.5 + 9.9)	93 + 45 (20.5 + 9.9)	93 + 45 (20.5 + 9.9)	93 (20.5)
	Luggage Capacity (VDA)		m^3 (cu.ft.)	0.259 (9.1)	0.259 (9.1)	0.259 (9.1)	0.259 (9.1)
Performance	Max. Speed		km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Max. Cruising Speed		km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Acceleration	0 to 100 km/h	sec.	7.8	7.8	-	7.8
		0 to 400 m	sec.	15.8	15.8	-	15.8
	Max. Permissible Speed*2	1st Gear	km/h (mph)	66 (41)	66 (41)	-	66 (41)
		2nd Gear	km/h (mph)	113 (70)	113 (70)	-	113 (70)
		3rd Gear	km/h (mph)	164 (102)	164 (102)	-	164 (102)
		4th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
		5th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
		6th Gear	km/h (mph)	220 (136)	220 (136)	-	220 (136)
	Min. Turning Radius	Tire	m (ft.)	5.9 (19.4)	5.9 (19.4)	-	5.9 (19.4)
		Body	m (ft.)	3.4 (11.2)	3.4 (11.2)	-	3.4 (11.2)
Engine	Engine Type			3UR-FE	3UR-FE	1UR-FE	3UR-FE
	No. of Cyls. & Arrangement			8-cylinder, V-type	8-cylinder, V-type	8-cylinder, V-type	8-cylinder, V-type
	Valve Mechanism			32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)	32-valve DOHC, Chain Drive (with Dual VVT-i)
	Bore × Stroke		mm (in.)	94.0 × 102.0 (3.70 × 4.02)	94.0 × 102.0 (3.70 × 4.02)	94.0 × 83.0 (3.70 × 3.27)	94.0 × 102.0 (3.70 × 4.02)
	Displacement		cm^3 (cu.in.)	5663 (345.6)	5663 (345.6)	4608 (281.2)	5663 (345.6)
	Compression Ratio			10.2 : 1	10.2 : 1	10.2 : 1	10.2 : 1
	Fuel System			EFI	EFI	EFI	EFI
	Research Octane No.			91 or higher	91 or higher	95 or higher	91 or higher
	Max. Output (ECC)		kW@rpm	270@5600	270@5600	234@5600	270@5600
	Max. Torque (ECC)		N·m@rpm	530@3200	530@3200	460@3400	530@3200
Engine Electrical	Battery Capacity (5HR)		Voltage & Amp. hr.	12 - 64	12 - 64	12 - 64	12 - 64
	Alternator Output		Watts	1800	1800	1800	1800
	Starter Output		kW	2.0	2.0	2.0	2.0
Chassis	Clutch Type			-	-	-	-
	Transmission Type			AB60F	AB60F	AB60F	AB60F
	Transmission Gear Ratio	1st		3.333	3.333	3.333	3.333
		2nd		1.960	1.960	1.960	1.960
		3rd		1.353	1.353	1.353	1.353
		4th		1.000	1.000	1.000	1.000
		5th		0.728	0.728	0.728	0.728
		6th		0.588	0.588	0.588	0.588
		Reverse		3.061	3.061	3.061	3.061
	Transfer Gear Ratio		H4/L4	1.000/2.618	1.000/2.618	1.000/2.618	1.000/2.618
	Differential Gear Ratio (Front/Rear)			3.909/3.909	3.909/3.909	4.300/4.300	3.909/3.909
	Differential Gear Size (Front/Rear)		mm (in.)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)	220 (8.7)/240 (9.5)
	Brake Type	Front		Ventilated Disc	Ventilated Disc	Ventilated Disc	Ventilated Disc
		Rear		Ventilated Disc	Ventilated Disc	Ventilated Disc	Ventilated Disc
	Parking Brake Type			Duo-servo Drum	Duo-servo Drum	Duo-servo Drum	Duo-servo Drum
	Brake Booster Type			Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Proportioning Valve Type			-	-	-	-
	Suspension Type	Front		Double-wishbone	Double-wishbone	Double-wishbone	Double-wishbone
		Rear		4-link with Lateral Rod	4-link with Lateral Rod	4-link with Lateral Rod	4-link with Lateral Rod
	Stabilizer Bar	Front		Standard	Standard	Standard	Standard
		Rear		Standard	Standard	Standard	Standard
	Steering Gear Type			Rack and Pinion	Rack and Pinion	Rack and Pinion	Rack and Pinion
	Steering Gear Ratio			14.2 - 17.6	14.2 - 17.6	14.2 - 17.6	14.2 - 17.6
	Power Steering Type			Hydraulic	Hydraulic	Hydraulic	Hydraulic

*1: Unladen vehicle
*2: Transfer in high
*3: Models for South Africa

1	China
	Station Wagon (8-seater)
	LX
	URJ201L-GNTGKC
5	5005 (197.0)
	1970 (77.6)
	1920 (75.6)
	2850 (112.2)
	1640 (64.6)
10	1635 (64.4)
	2615 (103.0)
	1655 (65.2)
	1200 (47.2)
	970 (38.2)
15	1185 (46.7)
	225 (8.9)
	25
	20
	1380 (3042)
20	1370 (3020)
	2750 (6063)
	1465 (3230)
	1885 (4156)
	3350 (7385)
25	93 + 45 (20.5 + 9.9)
	0.259 (9.1)
	220 (136)
	220 (136)
	7.8
30	15.8
	66 (41)
	113 (70)
	164 (102)
	220 (136)
35	220 (136)
	220 (136)
	5.9 (19.4)
	3.4 (11.2)
	3UR-FE
40	8-cylinder, V-type
	32-valve DOHC, Chain Drive (with Dual VVT-i)
	94.0 × 102.0 (3.70 × 4.02)
	5663 (345.6)
	10.2 : 1
45	EFI
	91 or higher
	270@5600
	530@3200
	12 - 64
50	1800
	2.0
	-
	AB60F
	3.333
55	1.960
	1.353
	1.000
	0.728
	0.588
60	3.061
	1.000/2.618
	3.909/3.909
	220 (8.7)/240 (9.5)
	Ventilated Disc
65	Ventilated Disc
	Duo-servo Drum
	Hydraulic
	-
	Double-wishbone
70	4-link with Lateral Rod
	Standard
	Standard
	Rack and Pinion
	14.2 - 17.6
75	Hydraulic