




















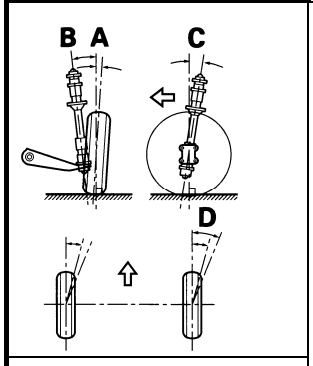



 **mm** *(in.)*	**A**	**162.7 to 172.7** *(6.41 to 6.79)*	**164.8 to 174.8** *(6.49 to 6.88)*
	B	**5 to 15** *(0.197 to 0.591)*	
	C	**20** *(0.787)*	
		SAE J1703 or FMVSS No. 116 DOT3	
			
 **mm** *(in.)*	**A**	**147.1 to 157.1** *(5.80 to 6.18)*	**149.1 to 159.1** *(5.87 to 6.26)*
	B	**1 to 6** *(0.0394 to 0.236)*	
	C*1	**67** *(2.64)*	**67.5** *(2.66)*
		SAE J1703 or FMVSS No. 116 DOT3	
200 N *(20 kgf, 45 lbf)* 		**5 to 7**	
 **mm** *(in.)*			
	A	**1.0** *(0.0394)*	
	B	**29.0** *(1.15)*	**16.0** *(0.630)*
 **mm** *(in.)*		**1.0** *(0.0394)*	
 **mm** *(in.)*		**241** *(9.48)*	
		**GRJ, UZJ**	
 **Liter** *(US qts, Imp. qts)*		**3.0** *(3.2, 2.6)*	
		API GL-4 or GL-5 **SAE 75W-90**	
 **Liter** *(US qts, Imp. qts)*		**Refer to Repair Manual Pub. No. RM0810E (A750F Automatic Transmission / Transaxle / Automatic Transmission Fluid)**	
		Toyota Genuine ATF WS	
 **Liter** *(US qts, Imp. qts)*		**1.4 to 1.5** *(1.47 to 1.59, 1.23 to 1.32)*	
		API GL-5 **SAE 75W-90**	

 **Liter** *(US qts, Imp. qts)*			
		1.85 to 1.95 *(1.96 to 2.06, 1.63 to 1.71)*	**Standard** **4.15 to 4.25** *(4.39 to 4.49, 3.66 to 3.74)* **w/ LSD** **w/ Differential Lock** **4.10 to 4.20** *(4.34 to 4.43, 3.60 to 3.69)*
		Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent	**w/o LSD** Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent **w/ LSD** Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent
N*m *(kgf*cm, ft.*lbf)*	**A**	**37** *(380, 27)*	
	B	**20** *(204, 15)*	
	C	**37** *(377, 27)*	
	D	**39** *(400, 29)*	**49** *(500, 36)*
		**GRJ, UZJ**	
 **N*m** *(kgf*cm, ft.*lbf)*		**For Aluminum Wheel** **131** *(1336, 97)* **For Steel Wheel** **209** *(2131, 154)*	
		**GRJ, UZJ**	
 **mm** *(in.)*		**30** *(1.18)*	
			
 		**Refer to Repair Manual Pub. No. RM0810E (Specifications / Alignment / Handling Diagnosis)**	
		**GRJ, UZJ**	
 **kPa** *(kgf/cm^2, psi)*		**Refer to Repair Manual Pub. No. RM0810E (Specifications / Tire / Wheel)**	

*1: When brake pedal is depressed with the force of 490 N (50 kgf, 110.2 lbf) while the engine is running.

LAND CRUISER Station Wagon






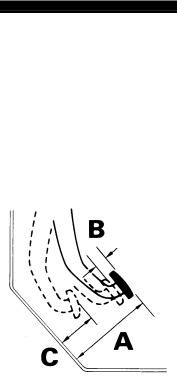








GRJ200, UZJ200 2007/08-2010/07














		GRJ, UZJ	
20°C *(68°F)*		**1.25 to 1.29**	
		1GR-FE	**2UZ-FE**
	CC *(cu. in.)*	**3956** *(241.4)*	**4664** *(284.5)*
A	**DENSO**	**K20HR-U11**	**SK20R11**
A	**NGK**	**LFR6C11**	**IFR6A11**
A	**A** **mm** *(in.)*	**1.0 to 1.1** *(0.039 to 0.043)*	
BTDC		**8 to 12°*1** (DLC3 terminals 13 (TC) and 4 (CG) connected)	**5 to 15°** (DLC3 terminals 13 (TC) and 4 (CG) connected)
mm *(in.)*		**0.15 to 0.25** *(0.00591 to 0.00984)*	
mm *(in.)*		**0.29 to 0.39** *(0.0114 to 0.0154)*	**0.25 to 0.35** *(0.00984 to 0.0138)*
rpm		**650 to 750 *1**	
kPa *(kgf/cm², psi)*		**1300** *(13.3, 189)*	**1373** *(14.0, 199)*
		1000 *(10.2, 145)*	**1030** *(10.5, 149)*
		100 *(1.0, 15)*	**98** *(1.0, 14.2)*

kPa *(kgf/cm², psi)*		**29** *(0.3, 4.2)*	
	3000 rpm	**294 to 588** *(3.0 to 6.0, 43 to 85)*	
		1GR-FE	**2UZ-FE**
A		**4.9** *(5.2, 4.3)*	**5.7** *(6.0, 5.0)*
A		**5.2** *(5.5, 4.6)*	**6.2** *(6.6, 5.5)*
A Liter *(US qts, Imp. qts)*		**10W-30*2:** **API grade SL "Energy-Conserving", SM "Energy-Conserving" or ILSAC multigrade engine oil** **10W-30:** **API grade SL and SM multigrade engine oil**	
N*m *(kgf*cm, ft.*lbf)*	A	**40** *(408, 30)*	**39** *(398, 29)*
Liter *(US qts, Imp. qts)*	1 3 5 / 2 4 R	**w/o Rear Heater** **12.0** *(12.7, 10.6)* **w/ Rear Heater** **14.6** *(15.4, 12.8)*	———
Liter *(US qts, Imp. qts)*	FRONT	**w/o Rear Heater** **11.2** *(11.8, 9.9)* **w/ Rear Heater** **14.4** *(15.2, 12.7)*	**w/o Transmission Oil Cooler** **Front Heater Only** **13.4** *(14.2, 11.8)* **Front and Rear Heater** **16.3** *(17.2, 14.3)* **w/ Transmission Oil Cooler** **Front Heater Only** **14.1** *(14.9, 12.4)* **Front and Rear Heater** **16.9** *(17.9, 14.9)*

*1: Transmission in neutral position and A/C switch OFF. *2: 10W-30 is the best choice for good fuel economy and good starting in cold weather.

TOYOTA MOTOR CORPORATION Technical Service Division

			
 **mm** *(in.)*	**A**	**162.7 to 172.7** *(6.41 to 6.79)*	**164.8 to 174.8** *(6.49 to 6.88)*
	B	**5 to 15** *(0.197 to 0.591)*	
	C	**20** *(0.787)*	
		**SAE J1703 or FMVSS No. 116 DOT3**	
			
 **mm** *(in.)*	**A**	**147.1 to 157.1** *(5.80 to 6.18)*	**149.1 to 159.1** *(5.87 to 6.26)*
	B	**1 to 6** *(0.0394 to 0.236)*	
	C*1	**67** *(2.64)*	**67.5** *(2.66)*
		**SAE J1703 or FMVSS No. 116 DOT3**	
 **200 N** *(20 kgf, 45 lbf)*		**5 to 7**	
 **mm** *(in.)*			
	A	**1.0** *(0.0394)*	
	B	**29.0** *(1.15)*	**16.0** *(0.630)*
 **mm** *(in.)*		**1.0** *(0.0394)*	
 **mm** *(in.)*		**241** *(9.48)*	
		**GRJ**	**UZJ**	**URJ**
 **Liter** *(US qts, Imp. qts)* **N*m** *(kgf*cm, ft.*lbf)*		**3.0** *(3.2, 2.6)*	-
		API GL-4 or GL-5 SAE 75W-90	-
	A	**37** *(380, 27)*	-
 **Liter** *(US qts, Imp. qts)* **N*m** *(kgf*cm, ft.*lbf)*		*2	*3
		Toyota Genuine ATF WS	
	B	**20** *(204, 15)*	

 **Liter** *(US qts, Imp. qts)* **N*m** *(kgf*cm, ft.*lbf)*	**C**	**1.4 to 1.5** *(1.47 to 1.59, 1.23 to 1.32)*	
		Toyota Genuine Transfer Gear Oil LF 75W or equivalent	
		37 *(377, 27)*	
 **Liter** *(US qts, Imp. qts)* **N*m** *(kgf*cm, ft.*lbf)*			
		1.85 to 1.95 *(1.96 to 2.06, 1.63 to 1.71)*	**Standard** **4.15 to 4.25** *(4.39 to 4.49, 3.66 to 3.74)* **w/ LSD** **w/ Differential Lock** **4.10 to 4.20** *(4.34 to 4.43, 3.60 to 3.69)*
		Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent	**w/o LSD** Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent **w/ LSD** Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent
	D	**39** *(400, 29)*	**49** *(500, 36)*
		**GRJ, UZJ, URJ**	
 **N*m** *(kgf*cm, ft.*lbf)*		**131** (*1336, 97*)***4** **209** (*2131, 154*)***5**	
		**GRJ, UZJ, URJ**	
 **mm** *(in.)*		**30** *(1.18)*	
			
	**A**	**Refer to Repair Manual Pub. No. RM0814E (Specifications / Alignment / Handling Diagnosis)**	-
	B		
	C		
	D		
	**E+F**		
	G-H **mm** *(in.)*		
			
 **kPa** *(kgf/cm^2, psi)*		**Refer to Repair Manual Pub. No. RM0814E (Specifications / Tire / Wheel)**	

*1: When brake pedal is depressed with the force of 490 N (50 kgf, 110.2 lbf) while the engine is running.
*2: Refer to Repair Manual Pub. No. RM0814E (A750F Automatic Transmission / Transaxle / Automatic Transmission Fluid)
*3: Refer to Repair Manual Pub. No. RM0814E (AB60F Automatic Transmission / Transaxle / Automatic Transmission Fluid)
*4: for Aluminum Wheel *5: for Steel Wheel

LAND CRUISER Station Wagon













GRJ200, UZJ200
URJ200









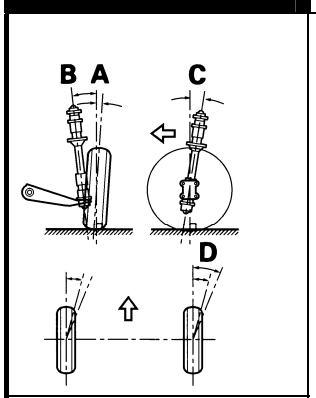



2010/07 -

	GRJ, URJ, UZJ		
20°C *(68°F)*	**1.25 to 1.29**		
	1GR-FE	**2UZ-FE**	**3UR-FE**
cc *(cu. in.)*	**2694** *(164.4)*	**4664** *(284.5)*	**5663** *(345.6)*
DENSO	**K20HR-U11**	**SK20HR11**	**SK20HR11**
NGK	**LFR6C11**	**IFR6A11**	-
A **mm** *(in.)*	**1.0 to 1.1** *(0.0394 to 0.0433)*		
BTDC	**8 to 12°*1** [DLC3 terminals 13 (TC) and 4 (CG) connected]	**5 to 15°*1** [DLC3 terminals 13 (TC) and 4 (CG) connected]	**8 to 12°*1** [DLC3 terminals 13 (TC) and 4 (CG) connected]
mm *(in.)*	**0.15 to 0.25** *(0.00591 to 0.00984)*		-
	0.29 to 0.39 *(0.0114 to 0.0154)*	**0.25 to 0.35** *(0.00984 to 0.0138)*	
[DLC3 terminal 9 (TAC) connected] **rpm**	**650 to 750*1**		

kPa *(kgf/cm², psi)*		**1300** *(13.3, 189)*	**1373** *(14.0, 199)*	**1300** *(13.3, 189)*
		1000 *(10.2, 145)*	**1030** *(10.5, 149)*	**1000** *(10.2, 145)*
		100 *(1.0, 15)*	**98** *(1.0, 14.2)*	**100** *(1.0, 15)*
kPa *(kgf/cm², psi)*		**29** *(0.3, 4.2)*		**70** *(0.7, 10.1)*
	rpm	**294 to 588** *(3.0 to 6.0, 43 to 85)*5		**220** *(2.2, 32)* *4
	1GR-FE	**2UZ-FE**	**3UR-FE**	
Liter *(US qts, Imp. qts)*		**4.9** *(5.2, 4.3)*	**5.7** *(6.0, 5.0)*	**7.1** *(7.5, 6.2)*
		5.2 *(5.5, 4.6)*	**6.2** *(6.6, 5.5)*	**7.5** *(7.9, 6.6)*
Liter *(US qts, Imp. qts)*		**10W-30*2:** **API grade SL "Energy-Conserving", SM "Energy-Conserving" or ILSAC*3 multigrade engine oil** **10W-30:** **API grade SL and SM multigrade engine oil**		**5W-30 and 10W-30:** **API grade SL "Energy-Conserving", API grade SM "Energy-Conserving" or ILSAC multigrade engine oil** **15W-40 and 20W-50:** **API grade SL and SM multigrade engine oil**
N*m *(kgf*cm, ft.*lbf)*	Ⓐ	**40** *(408, 30)*	**39** *(398, 29)*	**40** *(408, 30)*
Liter *(US qts, Imp. qts)*	1 3 5 / 2 4 R	**w/o Rear Heater** **12.0** *(12.7, 10.6)* **w/ Rear Heater** **14.6** *(15.4, 12.8)*	-	
	P R N D 2 L	**w/o Rear Heater** **11.2** *(11.8, 9.9)* **w/ Rear Heater** **14.4** *(15.2, 12.7)*	**w/o Transmission Oil Cooler Front Heater Only** **13.4** *(14.2, 11.8)* **Front and Rear Heater** **16.3** *(17.2, 14.3)* **w/ Transmission Oil Cooler Front Heater Only** **14.1** *(14.9, 12.4)* **Front and Rear Heater** **16.9** *(17.9, 14.9)*	**w/o Rear Heater** **13.4** *(14.2, 11.8)* **w/ Rear Heater** **16.2** *(17.1, 14.3)*

*1: Transmission in neutral position and A/C switch OFF. *2: 10W-30 is the best choice for good fuel economy and good starting in cold weather.
*3: ILSAC: International Standardization and Approval Committee *4: 2500 rpm *5: 3000 rpm

			
 **Mm** *(in.)*	**A**	**162.7 to 172.7** *(6.41 to 6.79)*	**164.8 to 174.8** *(6.49 to 6.88)*
	B	**5 to 15** *(0.197 to 0.591)*	
	C	⇧ **20** *(0.787)*	
		SAE J1703 or FMVSS No. 116 DOT3	
			
 **mm** *(in.)*	**A**	**147.1 to 157.1** *(5.80 to 6.18)*	**149.1 to 159.1** *(5.87 to 6.26)*
	B	**1 to 6** *(0.0394 to 0.236)*	
	C*1	⇧ **67** *(2.64)*	⇧ **67.5** *(2.66)*
		SAE J1703 or FMVSS No. 116 DOT3	
mm *(in.)*		**SAE J1703 or FMVSS No. 116 DOT3**	
200 N *(20 kgf, 45 lbf)* 		**5 to 7**	
 **mm** *(in.)*			
	A	⇧ **1.0** *(0.0394)*	
	B	⇧ **29.0** *(1.15)*	⇧ **16.0** *(0.630)*
 **mm** *(in.)*		⇧ **1.0** *(0.0394)*	
 **mm** *(in.)*		⇩ **241** *(9.48)*	
		**VDJ**	
 **Liter** *(US qts, Imp. qts)*	1 3 5 / 2 4 R	**3.0** *(3.2, 2.6)*	
		API GL-4 or GL-5 **SAE 75W-90**	
 **Liter** *(US qts, Imp. qts)*		**Refer to Repair Manual Pub. No. RM0810E (AB60F Automatic Transmission / Transaxle / Automatic Transmission Fluid)**	
		Toyota Genuine ATF WS	
 **Liter** *(US qts, Imp. qts)*		**1.4 to 1.5** *(1.47 to 1.59, 1.23 to 1.32)*	
		API GL-5 **SAE 75W-90**	

 **Liter** *(US qts, Imp. qts)*			
		1.85 to 1.95 *(1.96 to 2.06, 1.63 to 1.71)*	**Standard** **4.15 to 4.25** *(4.39 to 4.49, 3.66 to 3.74)* **w/ LSD** **w/ Differential Lock** **4.10 to 4.20** *(4.34 to 4.43, 3.60 to 3.69)*
		Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent	**w/o LSD** Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent **w/ LSD** Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent
N*m *(kgf*cm, ft.*lbf)*	**A**	**37** *(380, 27)*	
	B	**20** *(204, 15)*	
	C	**37** *(377, 27)*	
	D	**39** *(400, 29)*	**49** *(500, 36)*
		**VDJ**	
 **N*m** *(kgf*cm, ft.*lbf)*		**For Aluminum Wheel** **131** *(1336, 97)* **For Steel Wheel** **209** *(2131, 154)*	
		**VDJ**	
 **mm** *(in.)*		⇩ 30 *(1.18)*	
			
		**Refer to Repair Manual Pub. No. RM0810E (Specifications / Alignment / Handling Diagnosis)**	
			
		**VDJ**	
 **kPa** *(kgf/cm^2, psi)*		**Refer to Repair Manual Pub. No. RM0810E (Specifications / Tire / Wheel)**	

*1: When brake pedal is depressed with the force of 490 N (50 kgf, 110.2 lbf) while the engine is running.

LAND CRUISER Station Wagon

Diesel

VDJ200











2007/08-2010/07















	VDJ
20°C *(68°F)*	**1.25 to 1.29**
	1VD-FTV
CC *(cu. in.)*	**4461** *(272.2)*
20°C *(68°F)* **Ohm**	**Approximately 1**
secs	**40°C** *(104°F)*: **1**
secs	**40°C** *(104°F)*: **Maximum 21**
rpm (1 3 5 / 2 4 R)	**500 to 600** [DLC3 terminal 9 (TAC) connected]
rpm (P R N D 2 L)	**550 to 650** [DLC3 terminal 9 (TAC) connected]
rpm	**4700 to 4900** [DLC3 terminal 9 (TAC) connected]
kPa *(kgf/cm²*, *psi)*	**2700** *(27.5, 392)*
kPa *(kgf/cm²*, *psi)*	**2200** *(22.4, 319)*
kPa *(kgf/cm²*, *psi)*	**500** *(5.1, 73)*

kPa *(kgf/cm²*, *psi)*		**50** *(0.5, 7.3)*
	2500 rpm	**230** *(2.3, 33)*
		VDJ
Liter *(US qts, Imp. qts)*		**8.2** *(8.7, 7.2)*
		9.2 *(9.7, 8.1)*
		5W-30*2, 10W-30, 15W-40 and 20W-50: G-DLD-1, API CF-4, CF or ACEA B1 (You may also use API CE or CD)
N*m *(kgf*cm, ft.*lbf)*	A	**38** *(387, 28)*
	1 3 5 / 2 4 R	**15.4** *(16.3, 13.5)*
Liter *(US qts, Imp. qts)*	P R N D 2 L	**Front Heater Only** **14.8** *(15.6, 13.0)* **Front Heater and Rear Heater** **17.6** *(18.6, 15.5)* **Front Heater*1** **15.2** *(16.1, 13.4)* **Front Heater and Rear Heater*1** **18.0** *(19.0, 15.4)*

*1: with Viscous Heater
*2: 5W-30 is the best choice for good fuel economy and good starting in cold weather.

TOYOTA MOTOR CORPORATION Technical Service Division






			
	A	**162.7 to 172.7** *(6.41 to 6.79)*	**164.8 to 174.8** *(6.49 to 6.88)*
	B	**5 to 15** *(0.197 to 0.591)*	
	C	⇧ **20** *(0.787)*	
mm *(in.)*		**SAE J1703 or FMVSS No. 116 DOT3**	
			
	A	**147.1 to 157.1** *(5.80 to 6.18)*	**149.1 to 159.1** *(5.87 to 6.26)*
	B	**1.0 to 6.0** *(0.0394 to 0.236)*	
	C*1	⇧ **67** *(2.64)*	⇧ **67.5** *(2.66)*
mm *(in.)*		**SAE J1703 or FMVSS No. 116 DOT3**	
 **mm** *(in.)*		**5 to 7**	
			
mm *(in.)*	A	⇧ **1.0** *(0.0394)*	
	B	⇧ **29.0** *(1.15)*	⇧ **16.0** *(0.630)*
 **mm** *(in.)*		⇧ **1.0** *(0.0394)*	
 **mm** *(in.)*		⇧ **241** *(9.48)*	
		**VDJ**	
 **Liter** *(US qts, Imp. qts)*		**3.0** *(3.2, 2.6)*	
		API GL-4 or GL-5 SAE 75W-90	
N*m *(kgf*cm, ft.*lbf)*	A	**37** *(380, 27)*	
		**Refer to Repair Manual Pub. No. RM0814E (AB60F Automatic Transmission / Transaxle / Automatic Transmission Fluid)**	
Liter *(US qts, Imp. qts)*		**Toyota Genuine ATF WS**	
N*m *(kgf*cm, ft.*lbf)*	B	**20** *(204, 15)*	






 **Liter** *(US qts, Imp. qts)*		**1.4 to 1.5** *(1.47 to 1.59, 1.23 to 1.32)*	
		Toyota Genuine Transfer Gear Oil LF 75W or equivalent	
N*m *(kgf*cm, ft.*lbf)*	C	**37** *(377, 27)*	
 **Liter** *(US qts, Imp. qts)*			
		Standard **4.15 to 4.25** *(4.39 to 4.49, 3.66 to 3.74)* **w/ LSD** **w/ Differential Lock** **4.10 to 4.20** *(4.34 to 4.43, 3.60 to 3.69)*	
		1.85 to 1.95 *(1.96 to 2.06, 1.63 to 1.71)*	
		Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent	**w/o LSD** Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent **w/ LSD** Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent
N*m *(kgf*cm, ft.*lbf)*	D	**39** *(400, 29)*	**49** *(500, 36)*
		**VDJ**	
 **N*m** *(kgf*cm, ft.*lbf)*		**131** *(1336, 97)*2* **209** *(2131, 154)*3*	
		**VDJ**	
 **mm** *(in.)*		⇩ **30** *(1.18)*	
			
	A	**Refer to Repair Manual Pub. No. RM0814E (Specifications / Alignment / Handling Diagnosis)**	-
	B		
	C		
	D		
	E+F		
	G-H **mm** *(in.)*		
			
 **kPa** *(kgf/cm²*, *psi)*		**Refer to Repair Manual Pub. No. RM0814E (Specifications / Tire / Wheel)**	

*1: When brake pedal is depressed with the force of 490 N (50 kgf, 110.2 lbf) while the engine is running.
*2: for Aluminum Wheel *3: for Steel Wheel

LAND CRUISER Station Wagon

Diesel VDJ200 2010/07-

		VDJ
 **20°C** *(68°F)*		**1.25 to 1.29**
		1VD-FTV
cc *(cu. in.)*		**4461** *(272.2)*
20°C *(68°F)*  **Ohm**		**Approximately 1.0**
sec.		⬆ **40°C** *(104°F)*:**1**
		⬇ **40°C** *(104°F)*: **Maximum 21**
 **rpm**		1 3 5 / 2 4 R: **500 to 600** [DLC3 terminal 9 (TAC) connected]
		P R N D 2 L: **550 to 650** [DLC3 terminal 9 (TAC) connected]
		**4700 to 4900** [DLC3 terminal 9 (TAC) connected]
 **kPa** *(kgf/cm², psi)*		**2700** *(27.5, 392)*
		**2200** *(22.4, 319)*
		⬇ **500** *(5.1, 73)*

 **kPa** *(kgf/cm², psi)*		⬆ **50** *(0.5, 7.3)*
	2500 rpm 	⬆ **230** *(2.3, 33)*
		VDJ
 **Liter** *(US qts, Imp. qts)*		**8.2** *(8.7, 7.2)*
		**9.2** *(9.7, 8.1)*
		5W-30*2, 10W-30, 15W-40 and 20W-50: G-DLD-1, API CF-4, API CF or ACEA B1 (You may also use API CE or CD)
N*m *(kgf*cm, ft.*lbf)*	Ⓐ	**38** *(387, 28)*
 **Liter** *(US qts, Imp. qts)*	1 3 5 / 2 4 R: 	**15.4** *(16.3, 13.5)*
	P R N D 2 L: 	**Front Heater Only** **14.8** *(15.6, 13.0)* **Front Heater and Rear Heater** **17.6** *(18.6, 15.5)* **Front Heater with Viscous Heater** **15.2** *(16.1, 13.4)* ***1** **18.0** *(19.0, 15.4)*

*1: Front Heater and Rear Heater with Viscous Heater *2: 5W-30 is the best choice for good fuel economy and good starting in cold weather.

TOYOTA MOTOR CORPORATION Technical Service Division