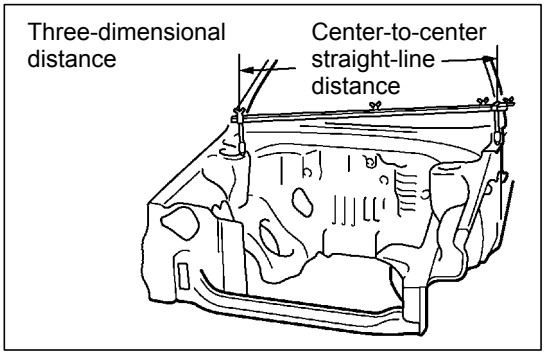



GENERAL INFORMATION

1. BASIC DIMENSIONS

(a) There are two types of dimensions in the diagram.

(1) (Three-dimensional distance)

- Straight-line distance between the centers of two measuring points.

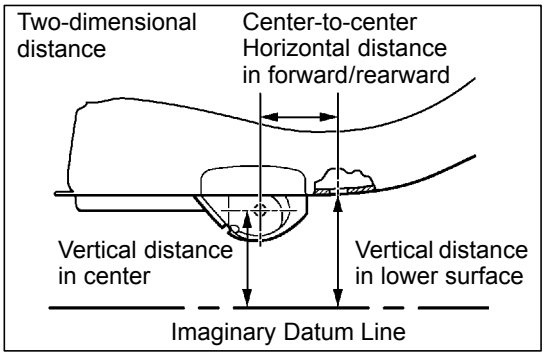


(2) (Two-dimensional distance)


- Horizontal distance in forward/rearward between the centers of two measuring points.
- The height from an imaginary datum line.

(b) In cases in which only one dimension is given, left and right are symmetrical.

(c) The dimensions in the following drawing indicate actual distance. Therefore, please use the dimensions as a reference.

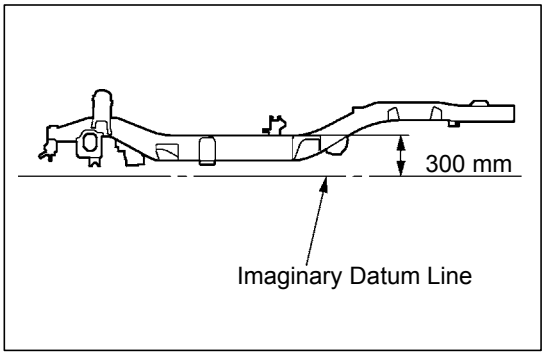


(d) The imaginary datum line when measuring the height is below 300 mm (11.81 in.) from the upper face on the center of the frame.

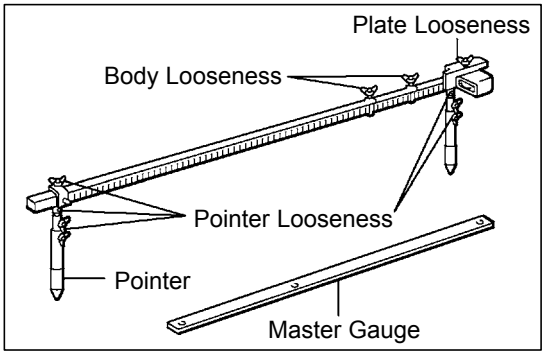

2. MEASURING

(a) Basically, all measurements are to be done with a tracking gauge. For portions where it is not possible to use a tracking gauge, a tape measure should be used.

(b) Use only a tracking gauge that has no looseness in the body, measuring plate, or pointers.

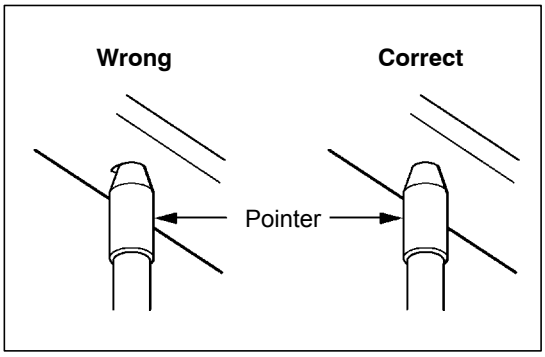

HINT:

1) The height of the left and right pointers must be equal.

2) Always calibrate the tracking gauge before measuring or after adjusting the pointer height.

3) Take care not to drop the tracking gauge or otherwise shock it.


4) Confirm that the pointers are securely in the holes.

(c) When using a tape measure, avoid twists and bends in the tape.

BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three - Dimensional Distance)

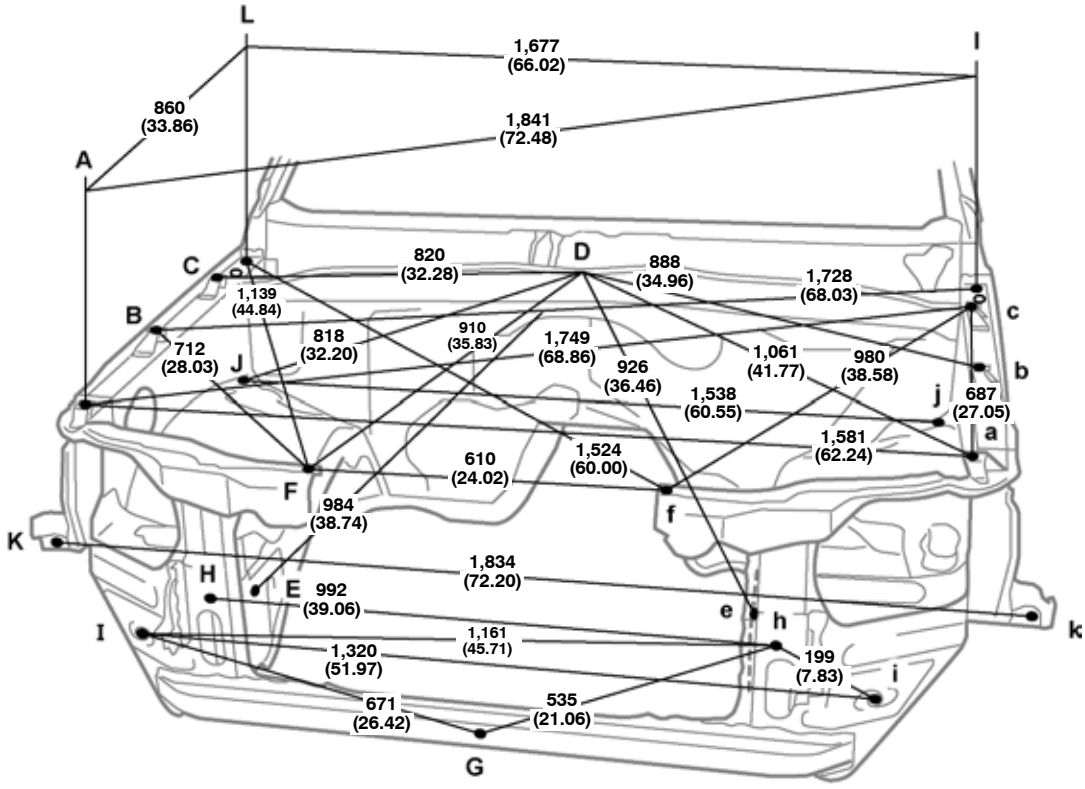

Vehicle Dimensions

B-f or b-F	B-L or b-l	C-f or c-F	B-b	C-c	E-e
1,224 (48.19)	510 (20.08)	1,399 (55.08)	1,625 (63.98)	1,637 (64.45)	918 (36.14)

Height from Imaginary Datum Line

A,a	F,f	L,l
923 (36.34)	887 (34.92)	984 (38.74)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front fender installation nut	M6 (0.24)	G	Hood lock support brace installation nut	M6 (0.24)
B, b	Front fender installation nut	M6 (0.24)	H, h	Radiator support standard hole	ø10 (0.39)
C, c	Front fender installation nut	M6 (0.24)	I, i	Radiator support standard hole	ø10 (0.39)
D	Cowl panel center mark	—	J, j	Front fender apron standard hole	ø15 (0.59)
E, e	Front fender No. 2 side apron standard hole	ø10 (0.39)	K, k	Front fender bracket standard hole	ø10 (0.39)
F, f	Radiator upper support installation nut	M6 (0.24)	L, l	Hood hinge installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Front)

(Three - Dimensional Distance)

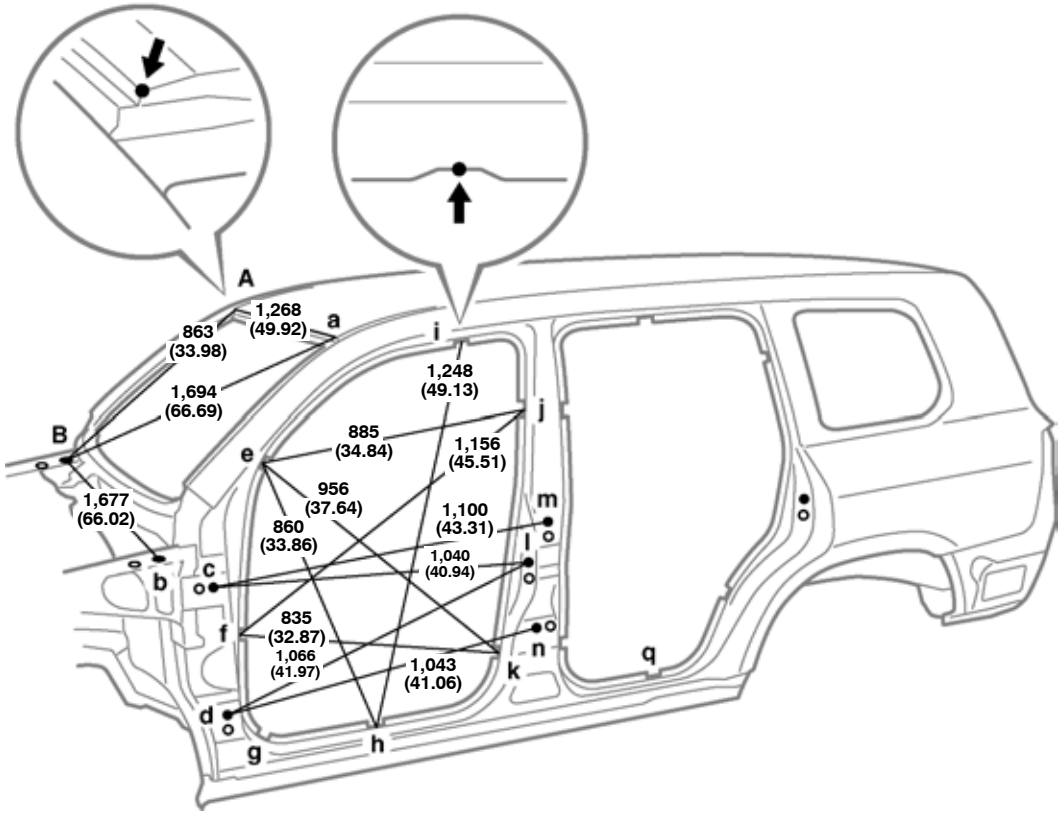

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-l	J-j	K-k	L-l
1,537 (60.51)	1,598 (62.91)	1,661 (65.39)	1,661 (65.39)	1,320 (51.97)	1,468 (57.80)	1,634 (64.33)	1,701 (66.97)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-q or g-Q	H-l or h-I	J-k or j-K
1,646 (64.80)	1,815 (71.46)	1,744 (68.66)	1,919 (75.55)	1,819 (71.61)	2,146 (84.49)	1,936 (76.22)	1,729 (68.07)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
E, e	Front body pillar assembly mark	—	L, l	Front door lock striker installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	N, n	Rear door hinge installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Rear)

(Three - Dimensional Ditance)

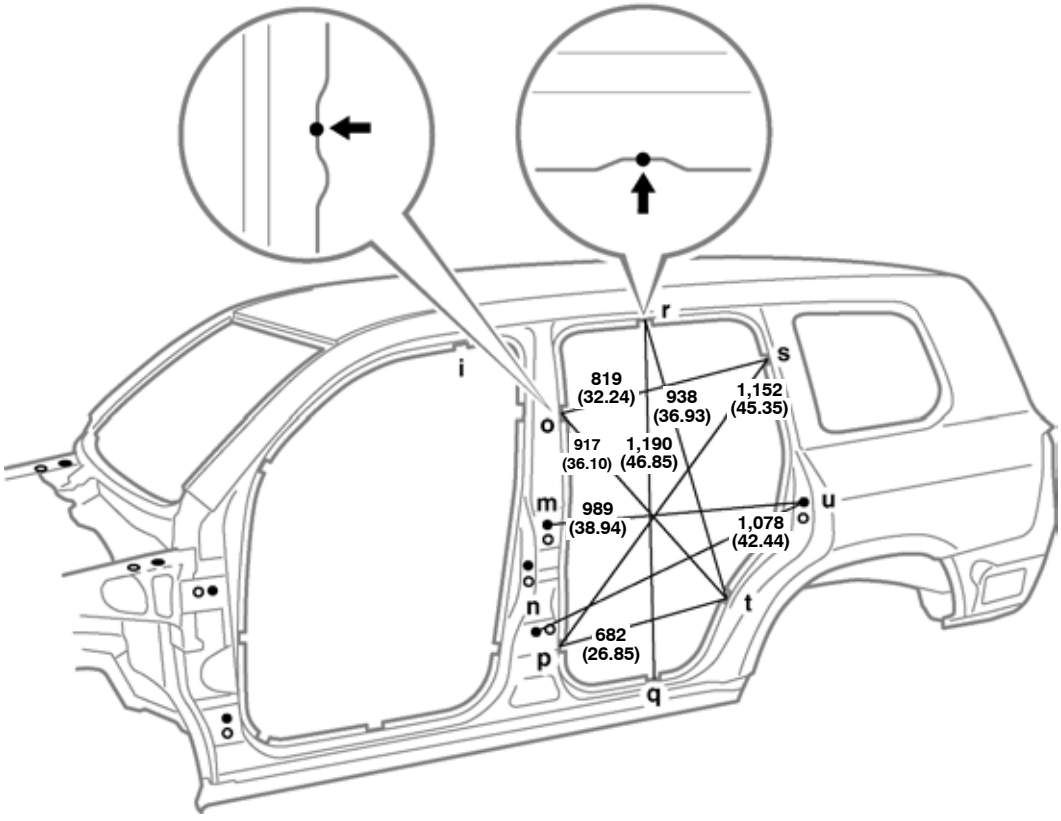

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,468 (57.80)	1,612 (63.46)	1,661 (65.39)	1,299 (51.14)	1,470 (57.87)	1,659 (65.31)	1,750 (66,57)

I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,480 (58.27)	1,682 (66.22)	1,810 (71.26)	1,772 (69.76)	1,890 (74.41)	1,711 (67.36)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
L, i	Front door lock striker installation nut	M8 (0.31)	Q, q	Rocker panel assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	R, r	Roof side rail assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	T, t	Quarter panel assembly mark	—
P, p	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Rear View)

(Three - Dimensional Distance)

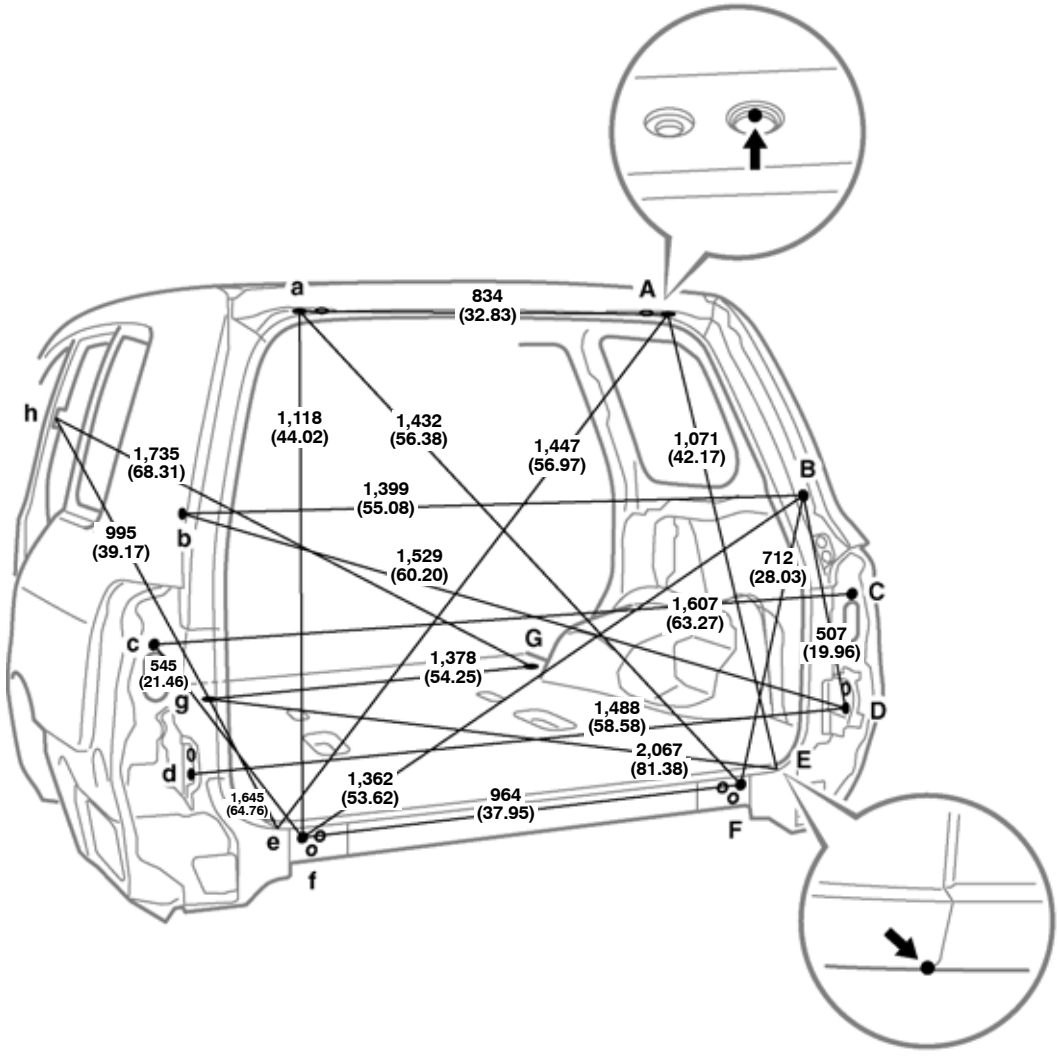

Vehicle Dimensions

C-f or c-F	E-e
1,359 (53.50)	1,136 (44.72)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole	ø13 (0.51)	E, e	Lower back panel No. 1 gusset corner	—
B, b	Back door damper stay installation nut	M8 (0.31)	F, f	Tail gate hinge installation nut	M8 (0.31)
C, c	Quarter panel extension standard hole	ø10 (0.39)	G, g	Rear floor pan standard hole	ø45 (1.77)
D, d	Tail gate lock striker installation nut	M8 (0.31)	H, h	Center body pillar assembly mark	—
			—	—	—

FRAME DIMENSION - Upper Face

(Three - Dimensional Distance)

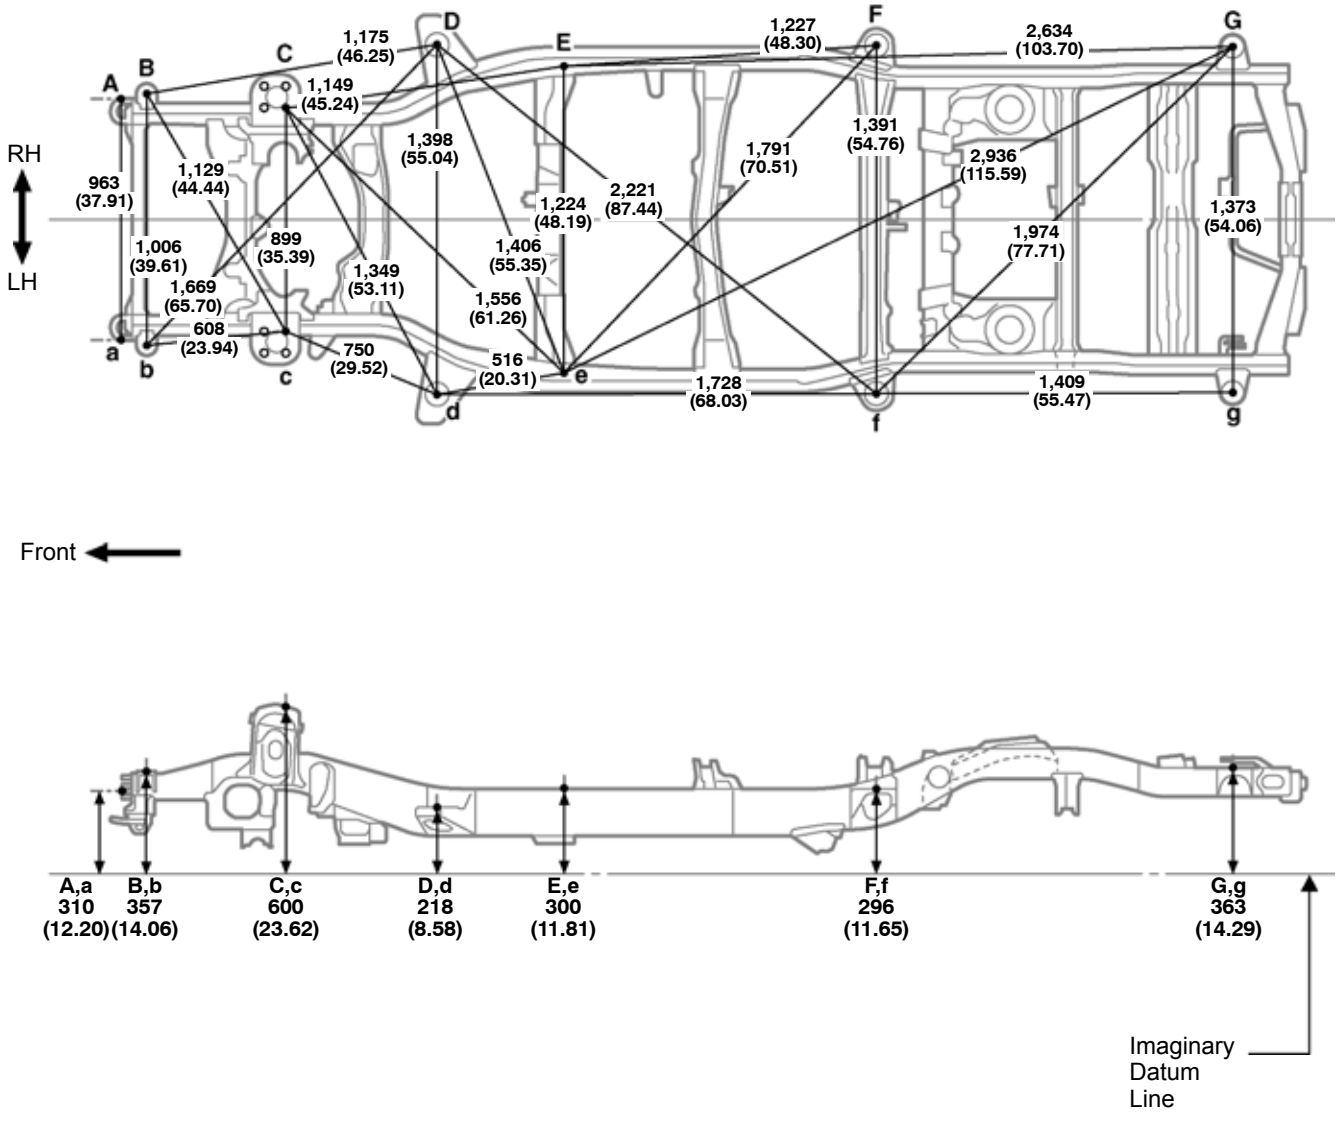


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)


Symbol	Name	Hole dia.			
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face

(Two - Dimensional Distance)

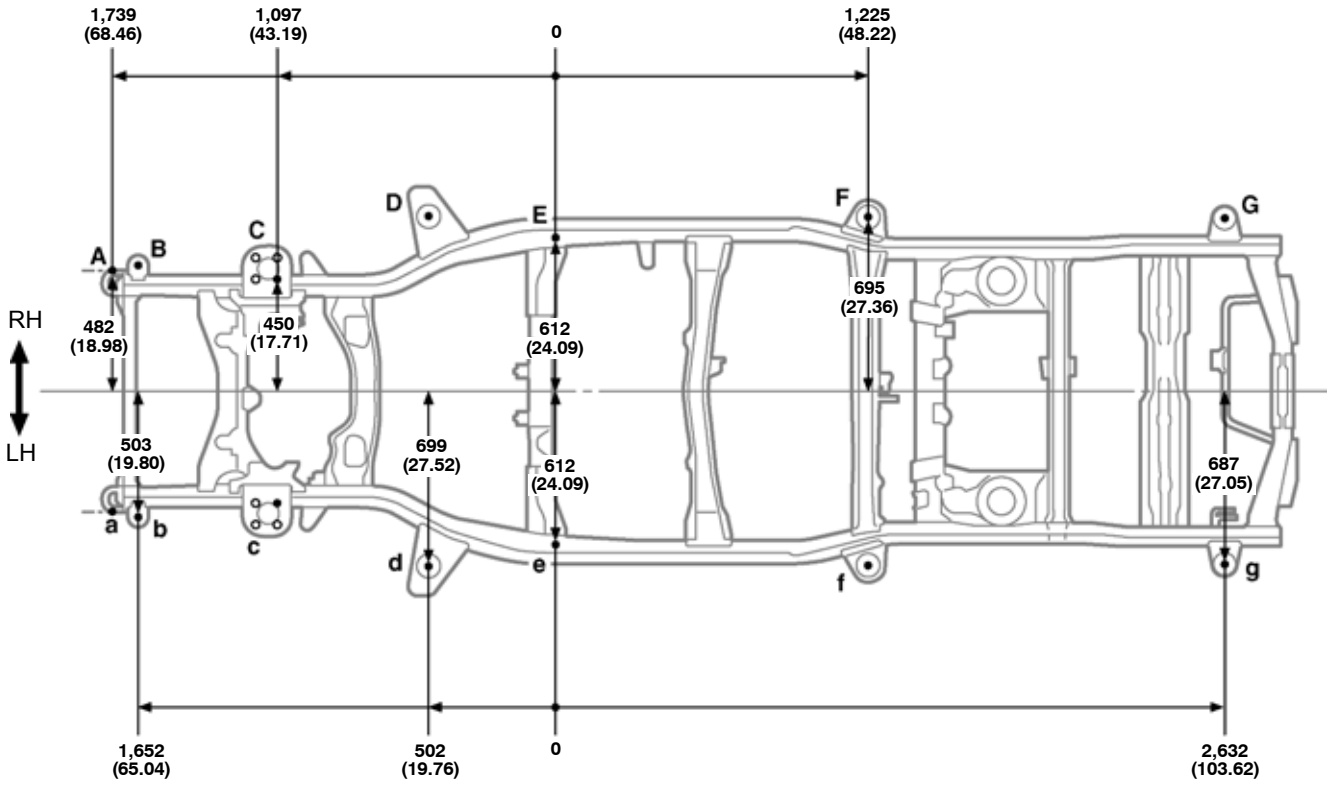

Wheel base	2,853 (112.32)

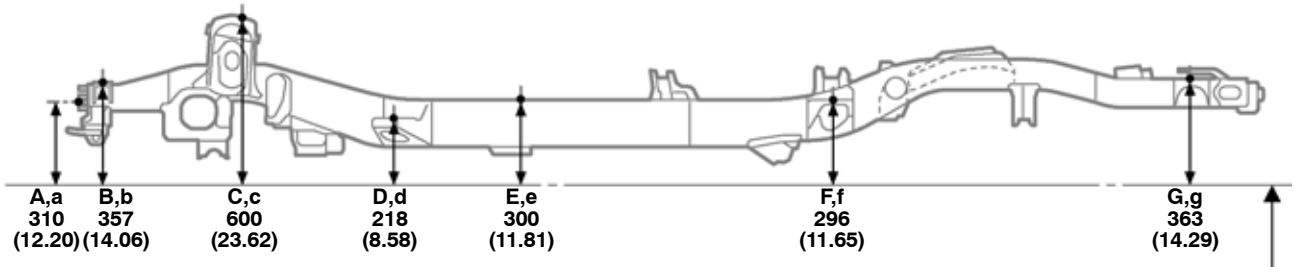


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face
With Kinetic Dynamic Suspension System

(Three - Dimensional Distance)

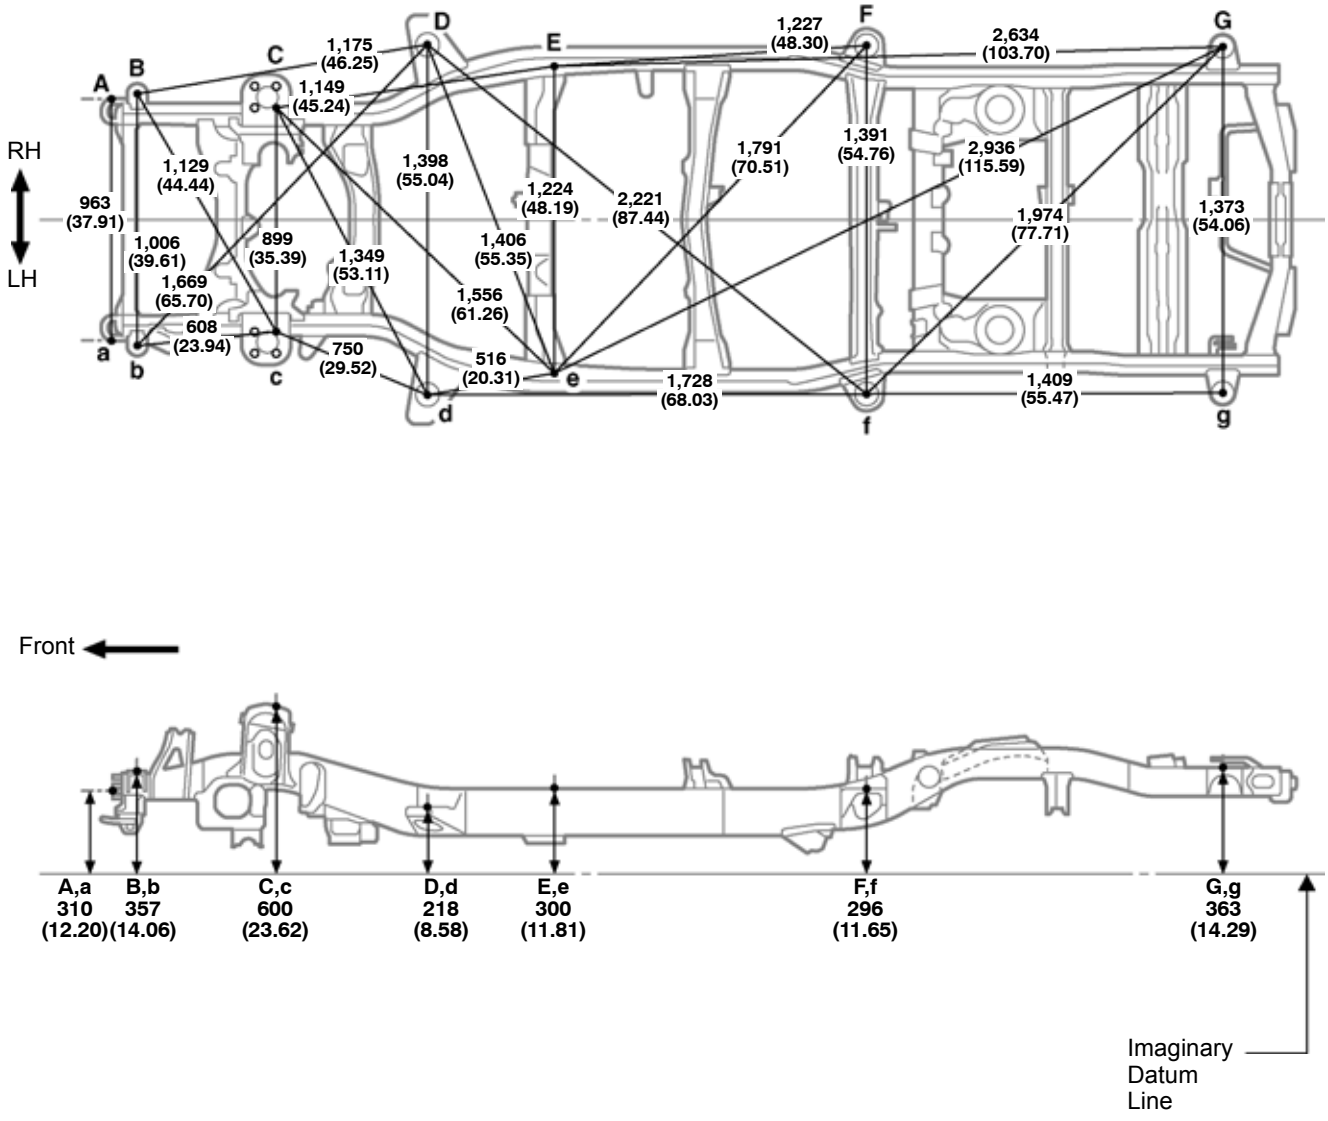


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)


FRAME DIMENSION - Upper Face
With Kinetic Dynamic Suspension system

(Two - Dimensional Distance)

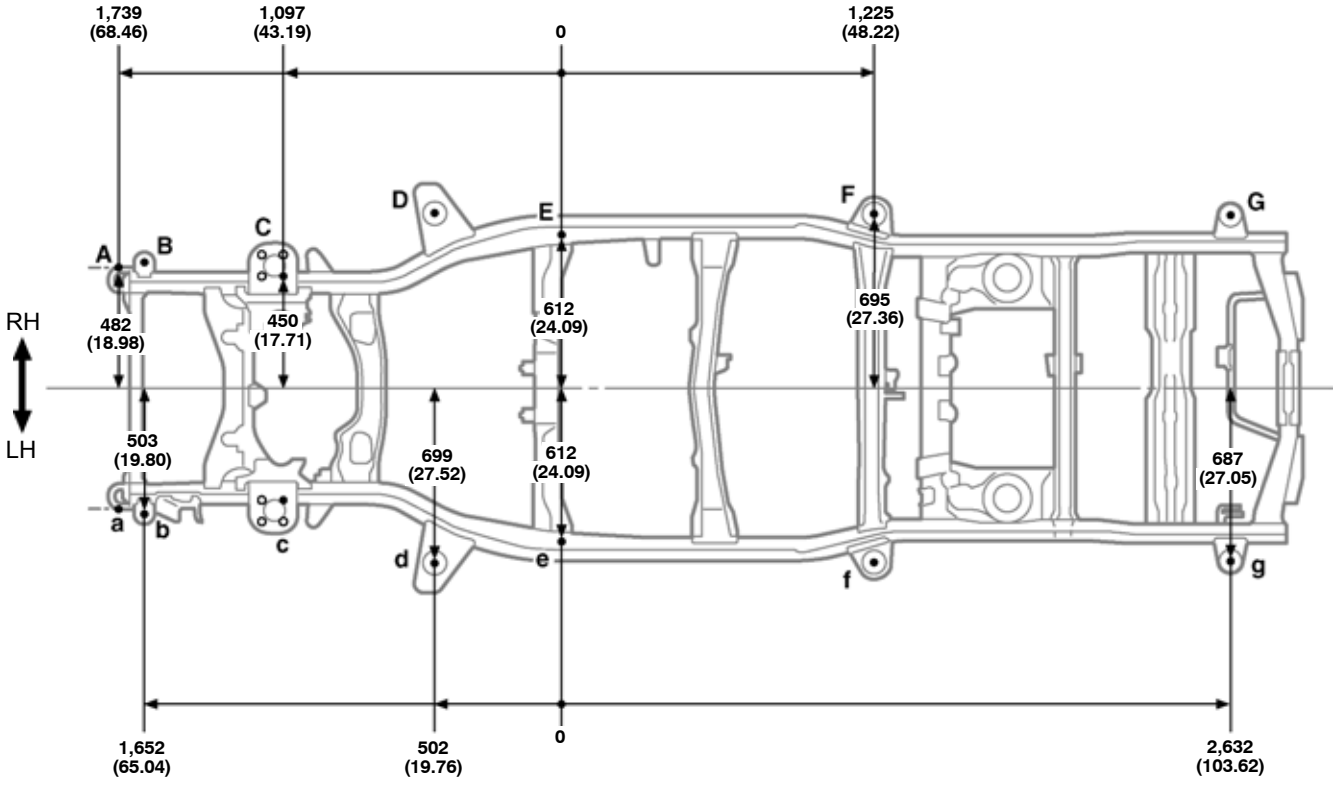

Front

Wheel base	2,853 (112.32)

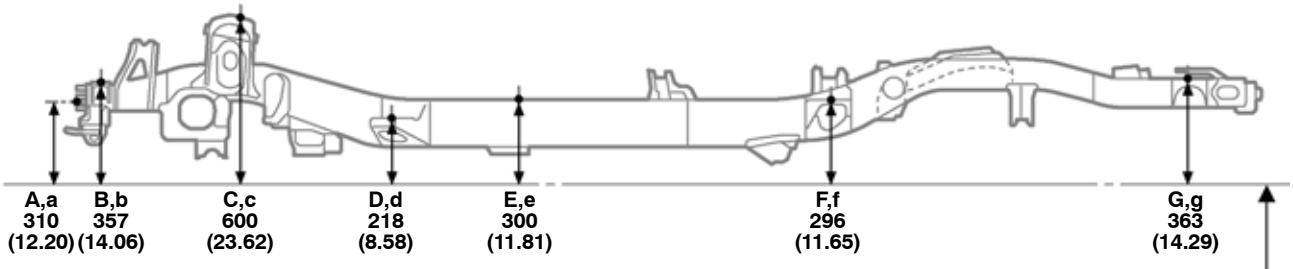

Imaginary Datum Line


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face With Winch

(Three - Dimensional Distance)

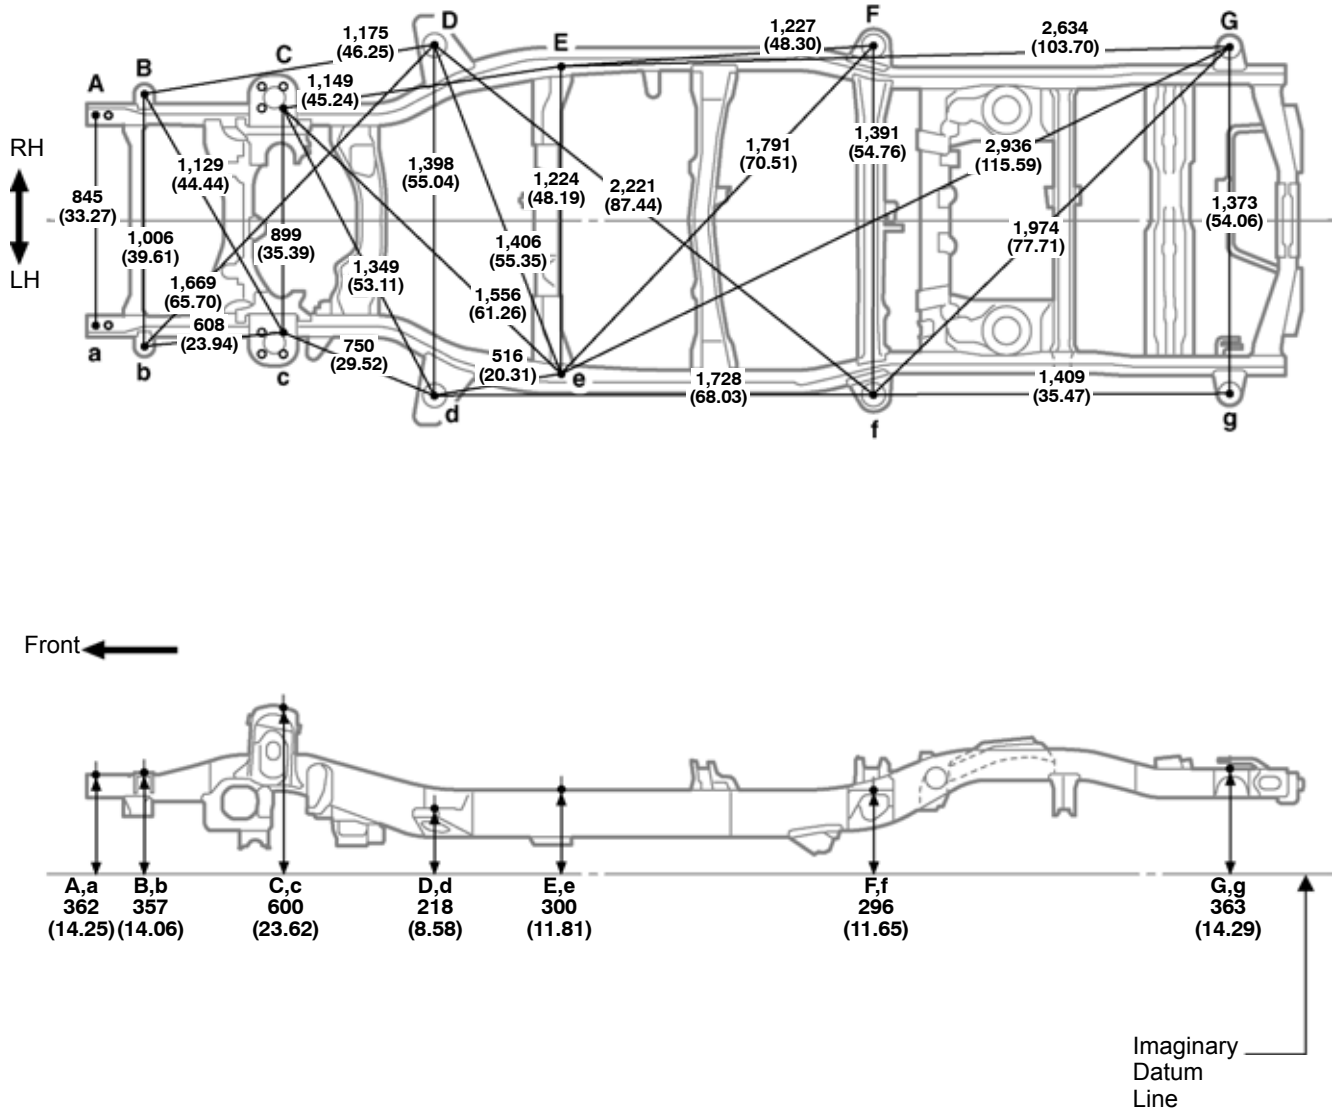


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Winch bracket installation nut	M12 (0.47)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face With Winch

(Two - Dimensional Distance)

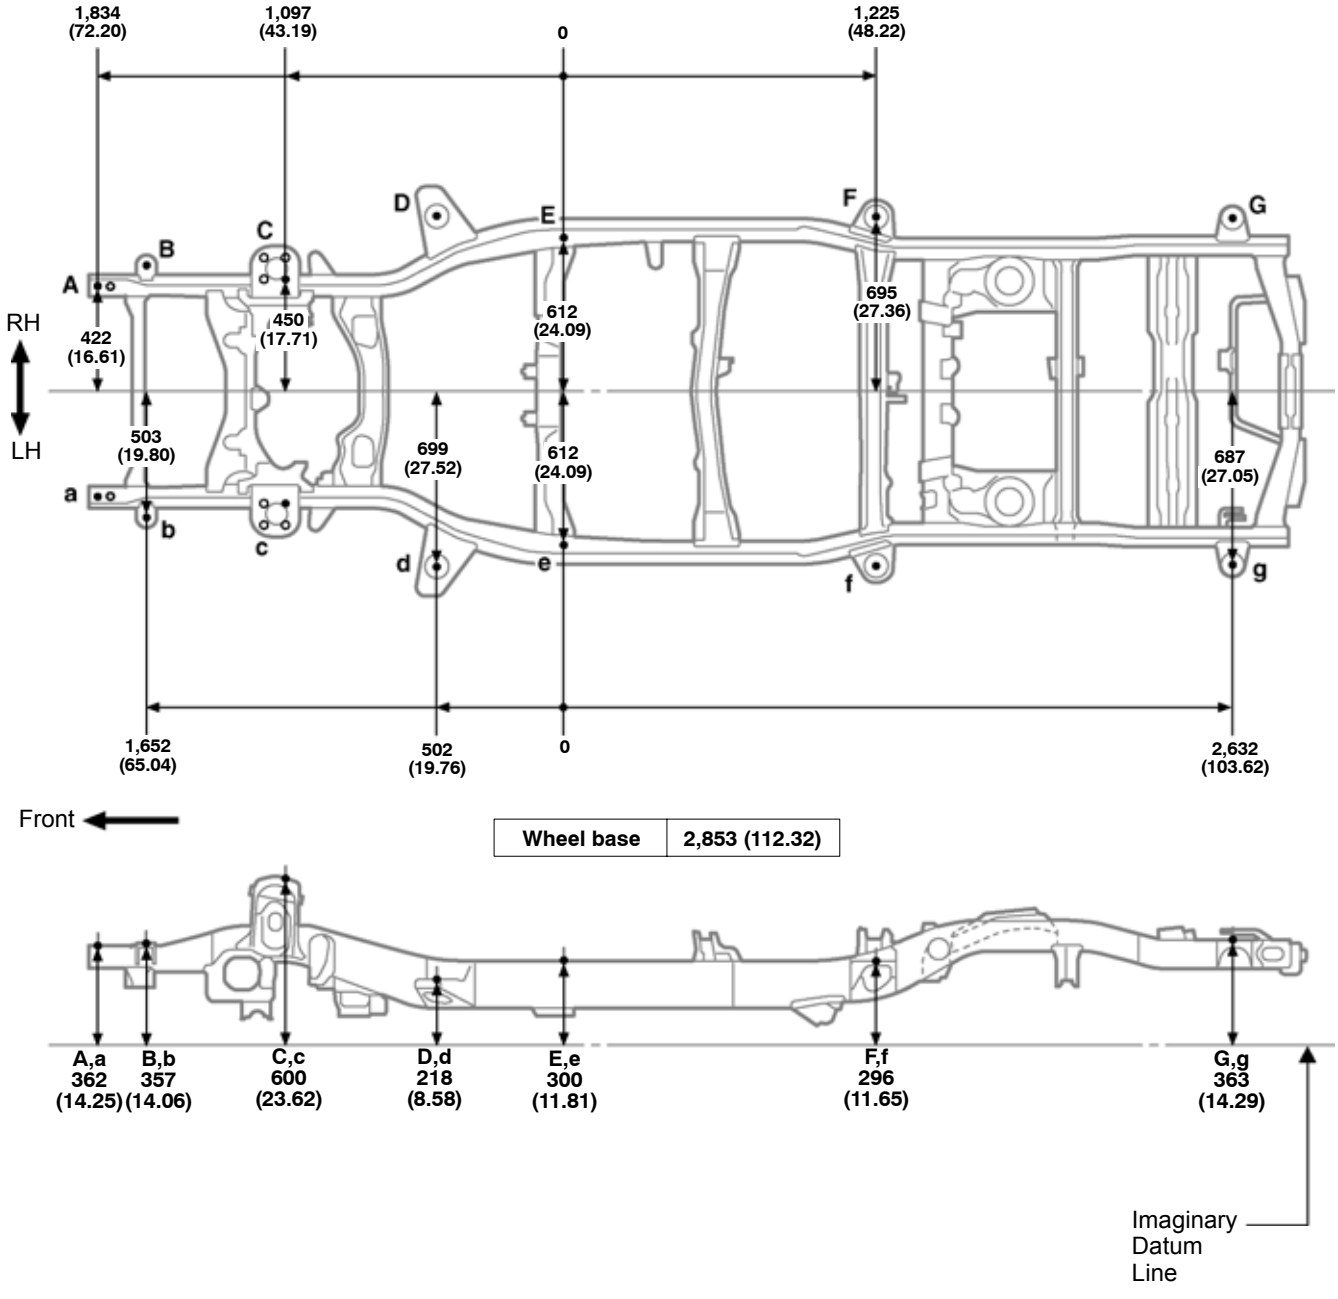


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Winch bracket installation nut	M12 (0.47)	D, d	No. 2 body mounting hole	ø43 (1.69)
B, b	No. 1 body mounting hole	ø26 (1.02)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
C, c	Front spring support hole	ø12.2 (0.480)	F, f	No. 3 body mounting hole	ø43 (1.69)
			G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Lower Face


(Three - Dimensional Distance)

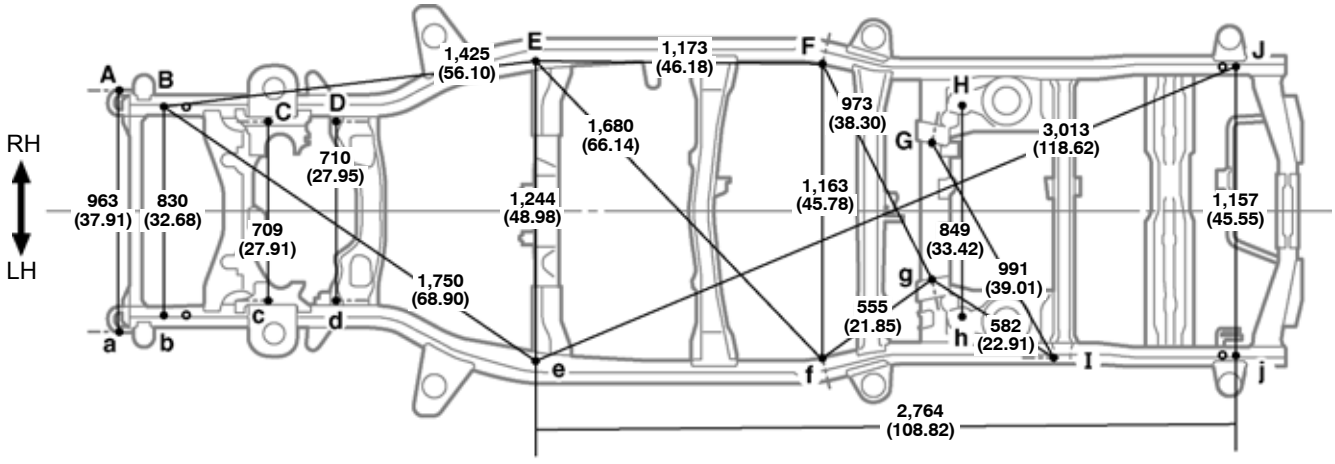

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front

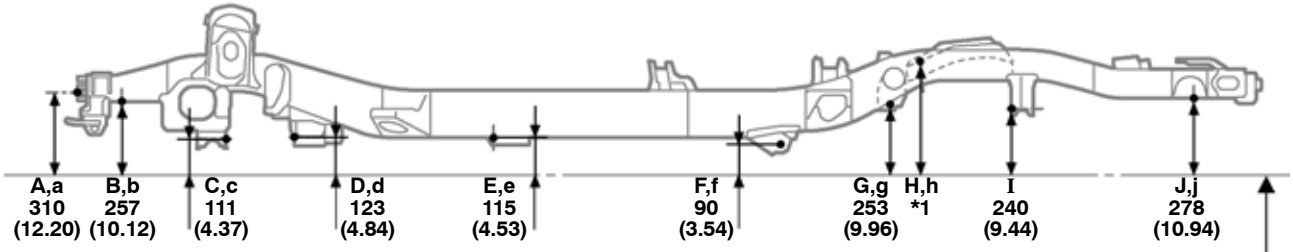

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)


Symbol	Name	Hole dia.			
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	I	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Lower Face

(Two - Dimensional Distance)

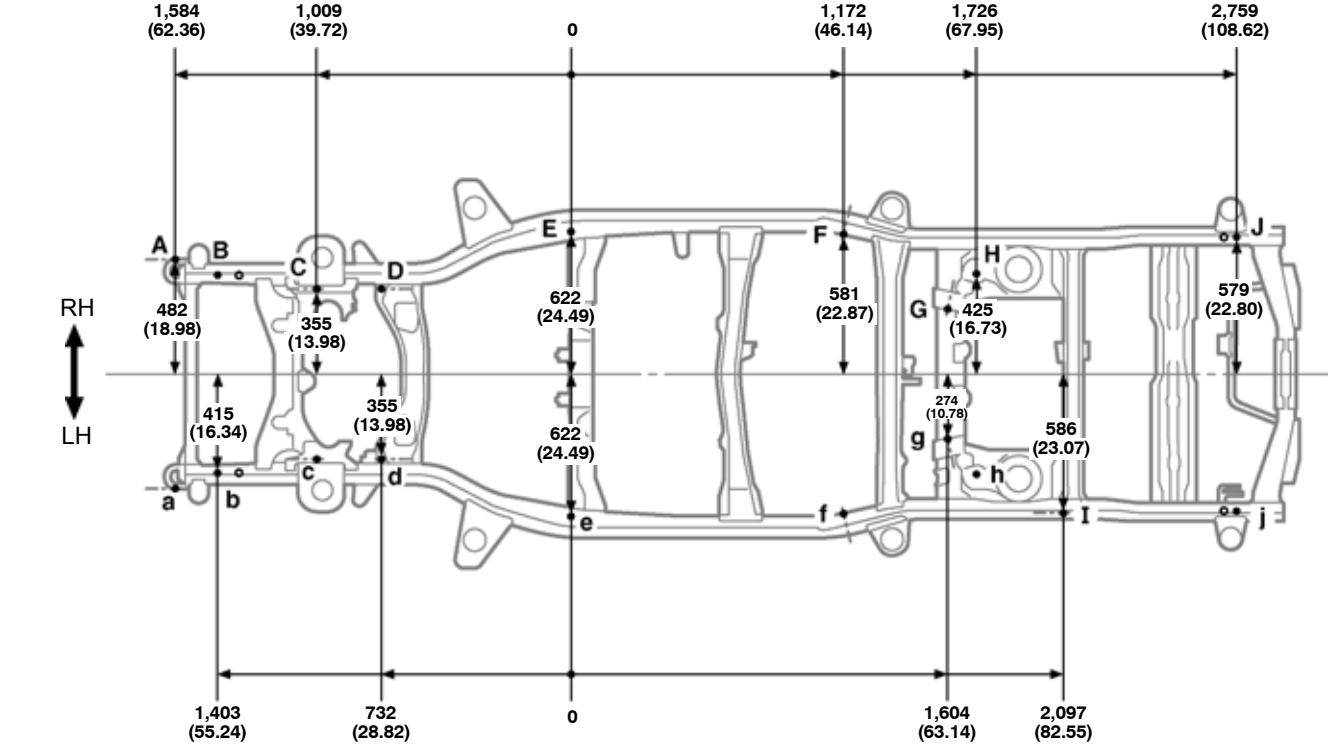

Wheel base	2,853 (112.32)

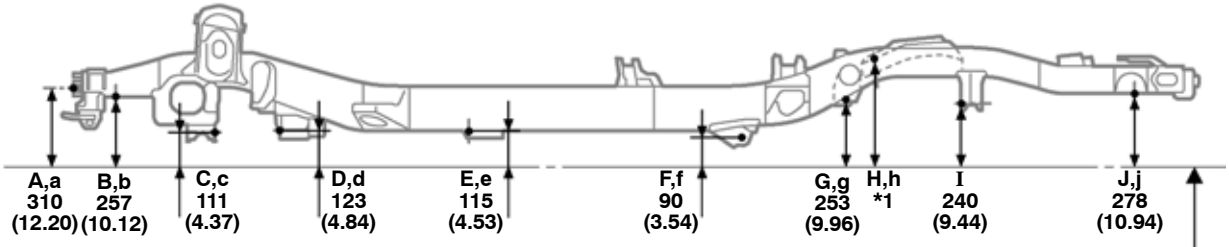

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	I	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	M12 (0.47)
			—	—	—

FRAME DIMENSION - Lower Face
With Kinetic Dynamic Suspension system


(Three - Dimensional Distance)

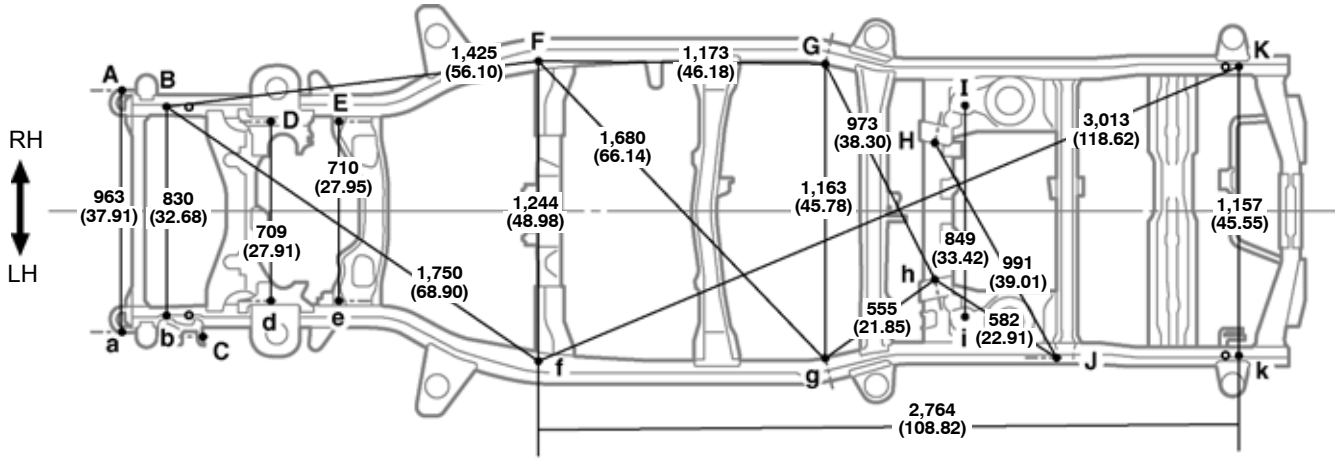

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front

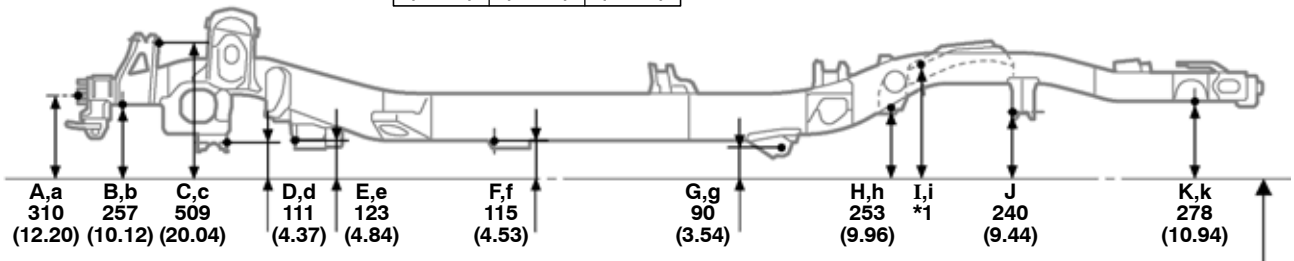

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	F, f	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Lower control arm installation hole - inner	ø16.5 (0.650)
C, c	Kinetic Dynamic Suspension System bracket installation hole	ø18.5 (0.728)	H, h	Upper control arm installation hole - inner	ø14.5 (0.571)
D, d	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I, i	Rear shock absorber installation hole	ø29.5 (1.161)
E, e	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J	Lateral control rod installation hole - front	ø15 (0.59)
			K, k	Transport hook installation nut	M12 (0.47)


FRAME DIMENSION - Lower Face
With Kinetic Dynamic Suspension system

(Two - Dimensional Distance)

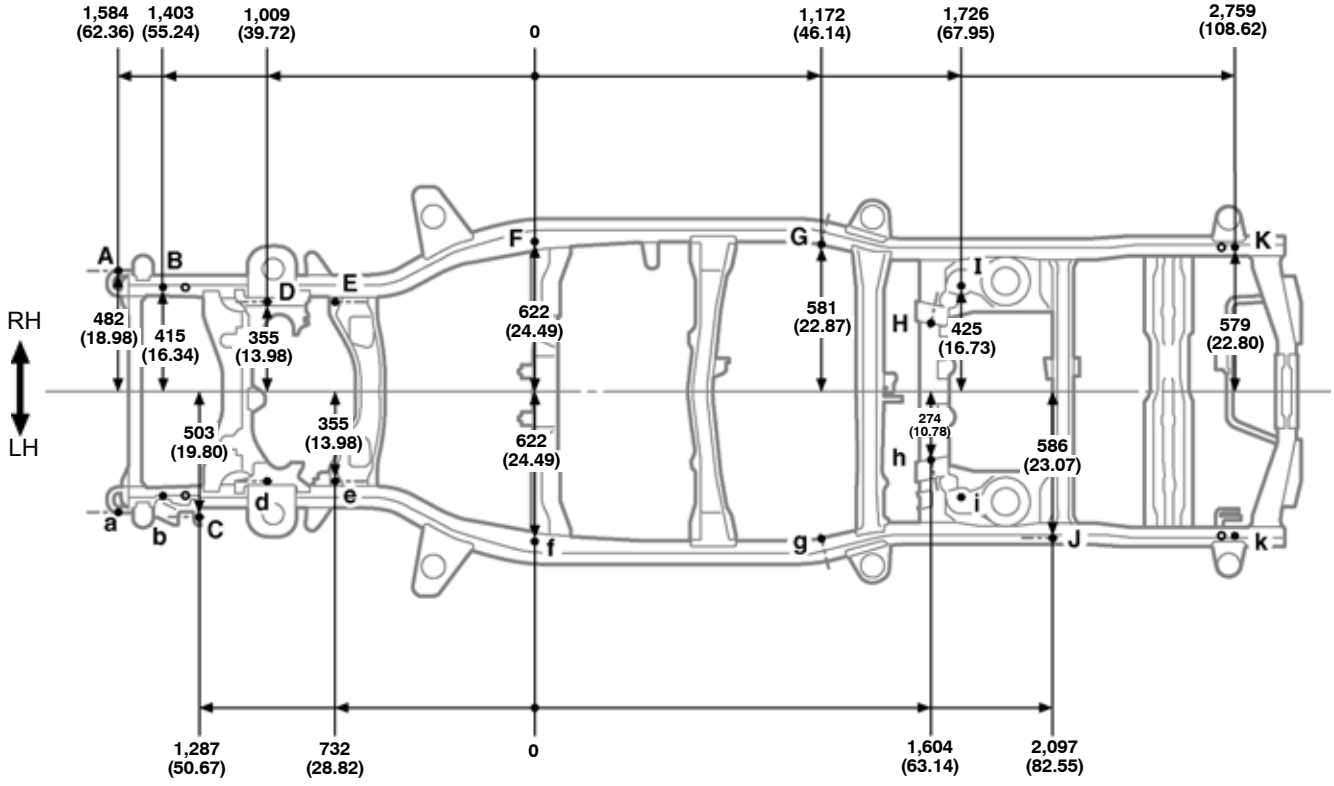

Front ←

Wheel base	2,853 (112.32)

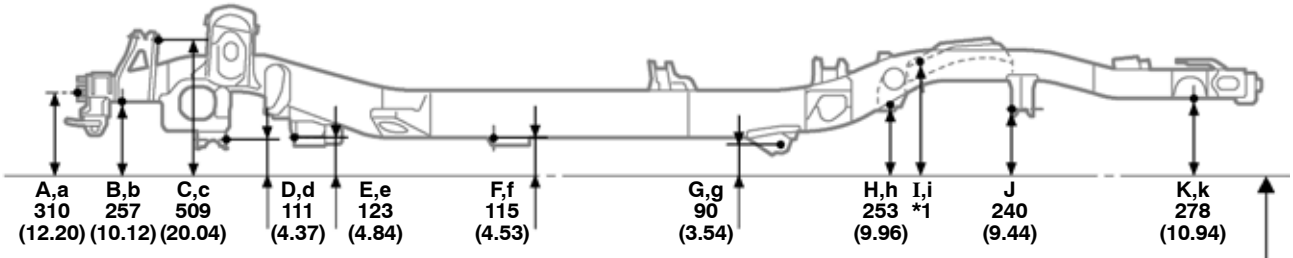

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bamper extension No. 2 installation bolt	M10 (0.39)	F, f	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Lower control arm installation hole - inner	ø16.5 (0.650)
C, c	Kinetic Dynamic Suspension System bracket installation hole	ø18.5 (0.728)	H, h	Upper control arm installation hole - inner	ø14.5 (0.571)
D, d	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I, i	Rear shock absorber installation hole	ø29.5 (1.161)
E, e	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J	Lateral control rod installation hole - front	ø15 (0.59)
			K, k	Transport hook installation nut	M12 (0.47)

FRAME DIMENSION - Lower Face With Winch


(Three - Dimensional Distance)

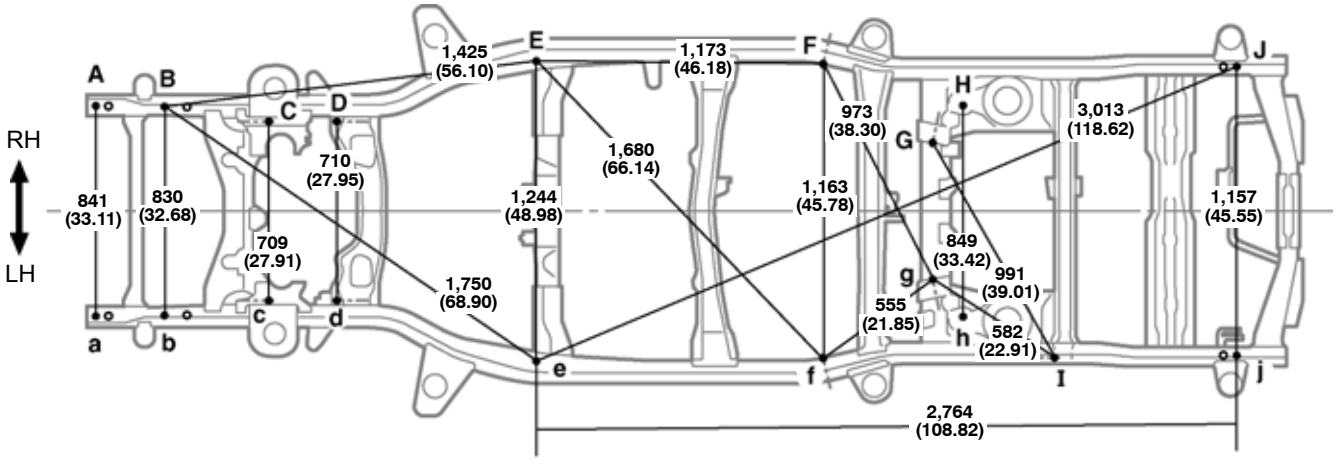

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front

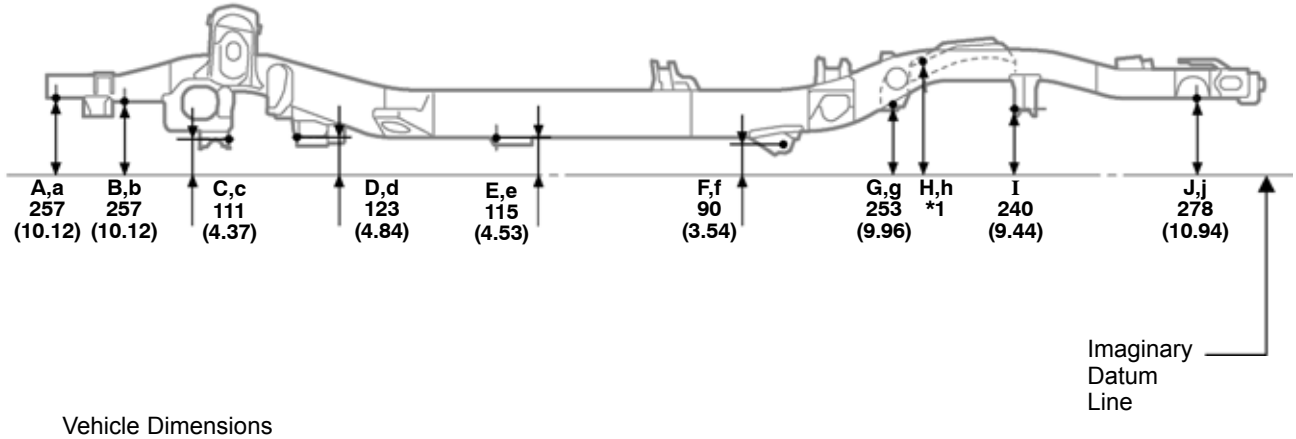

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Winch bracket installation nut	M12 (0.47)	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	I	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	M12 (0.47)
			—	—	—


FRAME DIMENSION - Lower Face With Winch

(Two - Dimensional Distance)

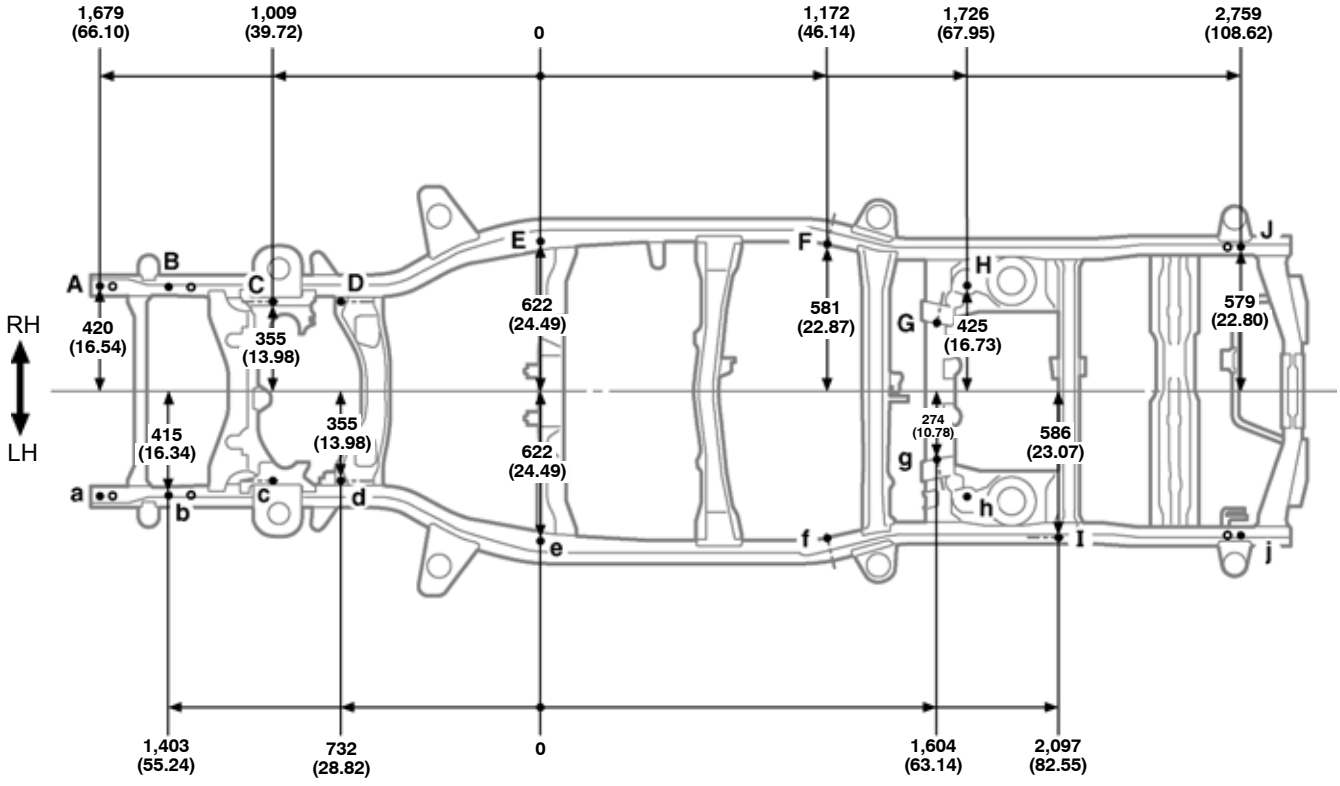

Front

Wheel base	2,853 (112.32)

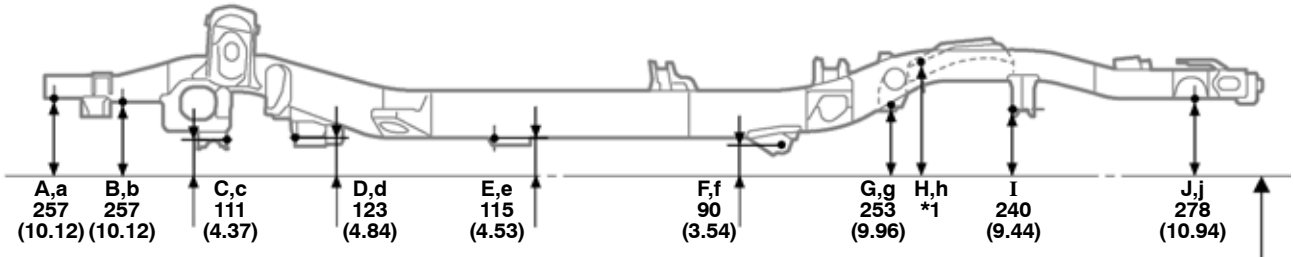

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.			
A, a	Winch bracket installation nut	M12 (0.47)	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	I	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	M12 (0.47)
			—	—	—

REFERENCE VALUE
ENGINE COMPARTMENT

(Three - Dimensional Distance)

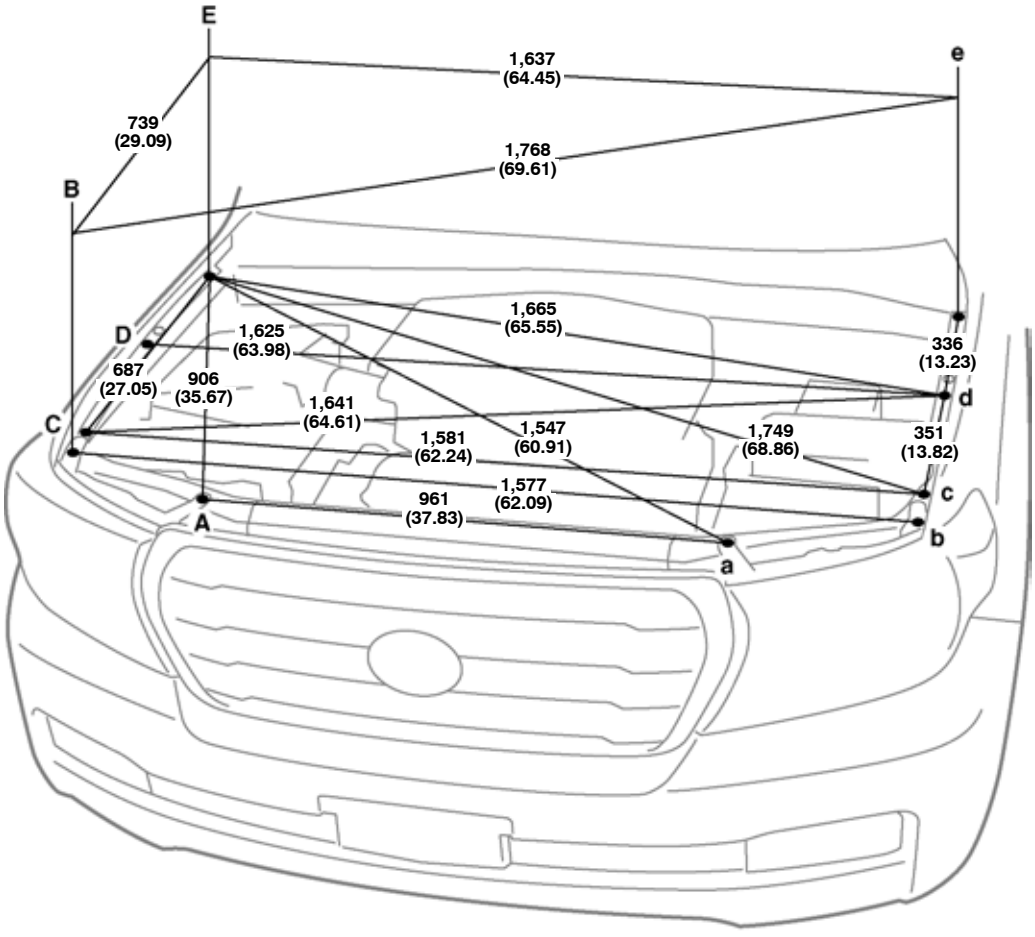

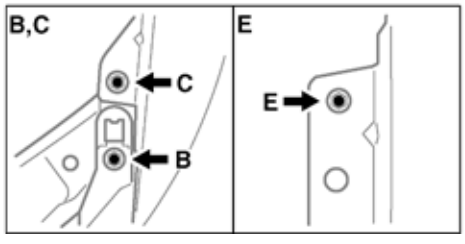

HINT:
1) For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).
2) These values are actual measurements made on model. Use these reference values.

mm (in.)


Symbol	Name	Hole dia.			
A, a	Headlight installation clip	—	C, c	Front fender installation bolt	—
B, b	Headlight installation clip	—	D, d	Front fender installation bolt	—
			E, e	Front fender installation bolt	—

UNDER BODY


(Two - Dimensional Distance)


Front spring support


[RH]

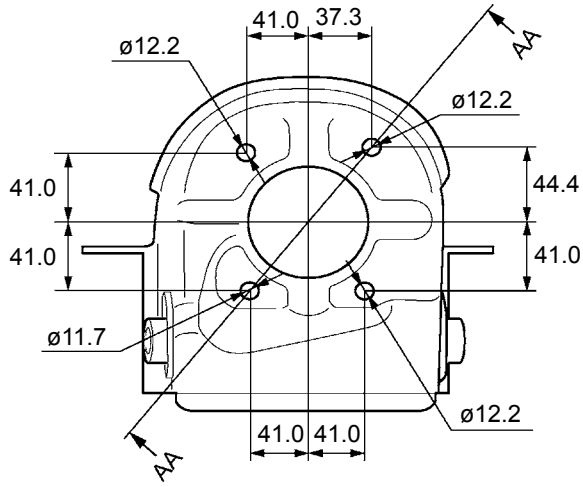



[LH]

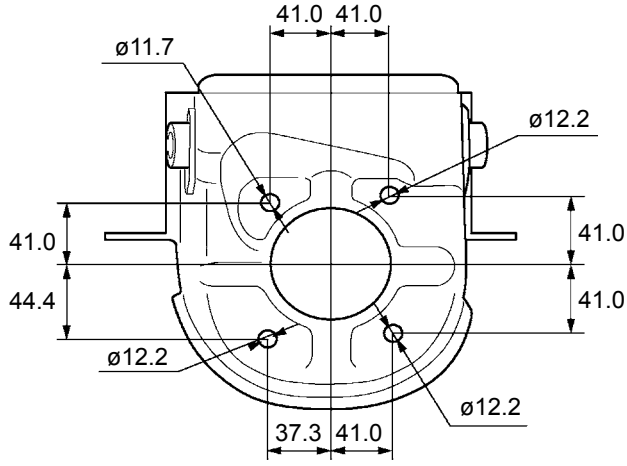

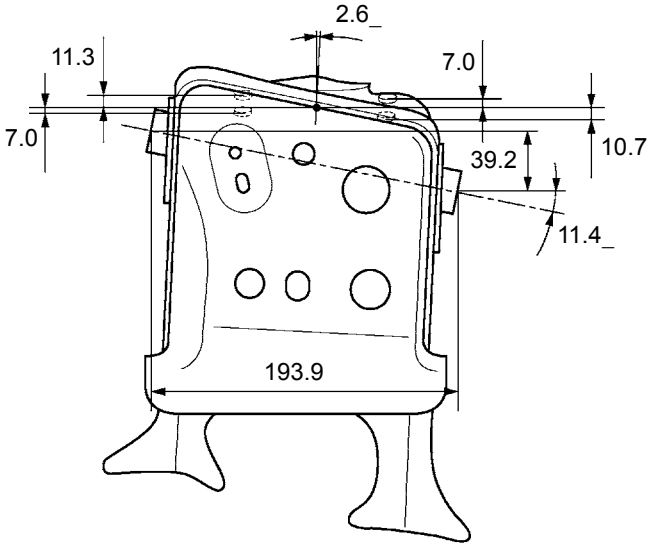

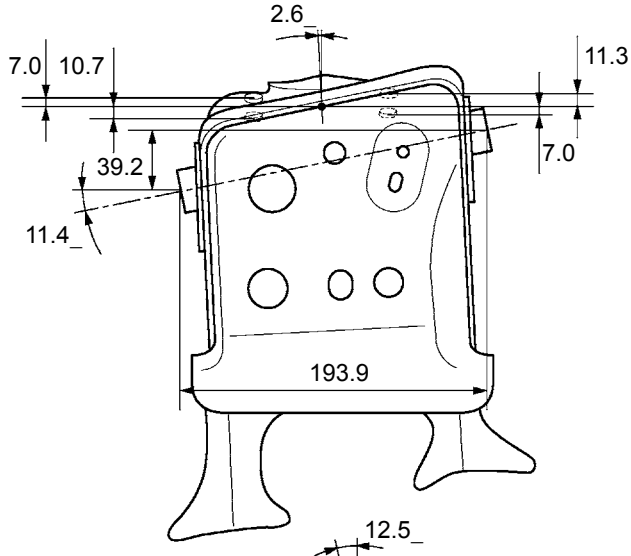

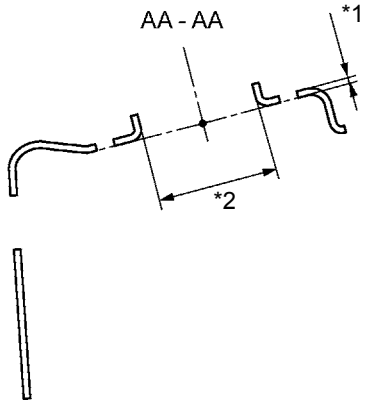

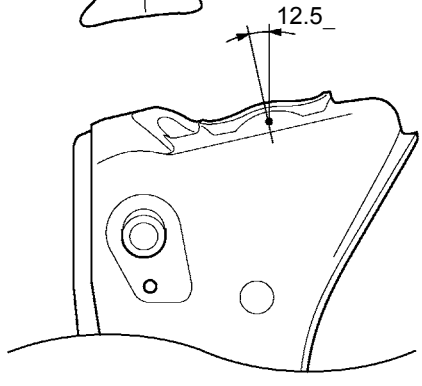

Vehicle Dimensions


	Heavy Duty	Light Duty
*1	3.8	3.2
*2	ø76.0	ø75.7


mm


UNDER BODY


(Two - Dimensional Distance)

Rear spring support

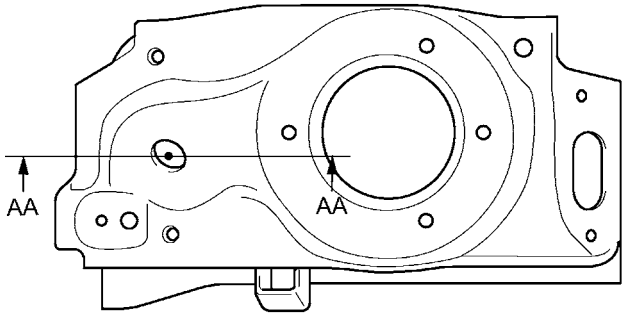



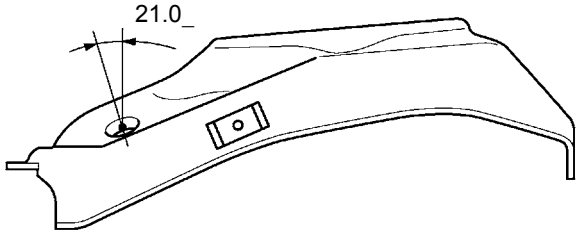

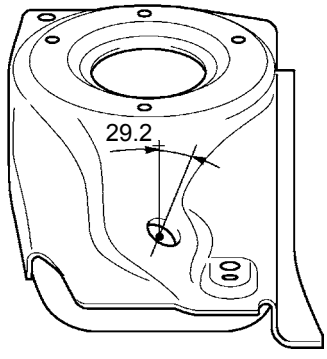

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	6	3.2

mm